


1 2 3 4 5 6

No.	Revision	Date	Name
△			
△			

RoHS Compliant

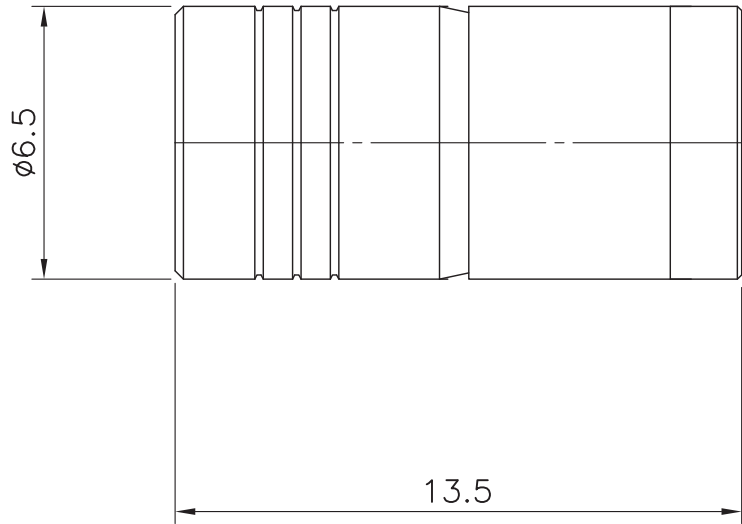

SPECIFICATIONS

Frequency Range----- DC-2GHz
 VSWR-----1.20:1Max.
 Impedance----- 50 Ohms
 Power Rating----- 1 Watts
 Oper Temp Range----- -30°C~+80°C

Connector----- Brass/Gold plated
 Conductors----- BeCu/Gold plated

SMB-PLUG TERMINATION
 (50 OHm)

D
C
B
A

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	1P-901-00	NAME	SMB-PLUG-TERM.		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT	mm		DESIGNED S.J.LEE
DWG NO.		1P-901-00		DATE. 10/JUN/2006	

Cross RF
 web: www.crossrf.com