


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date 10/12/00
			Checked M.H.	Date 10/12/00
			Drawn K.R.E.	Date 10/11/00
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		

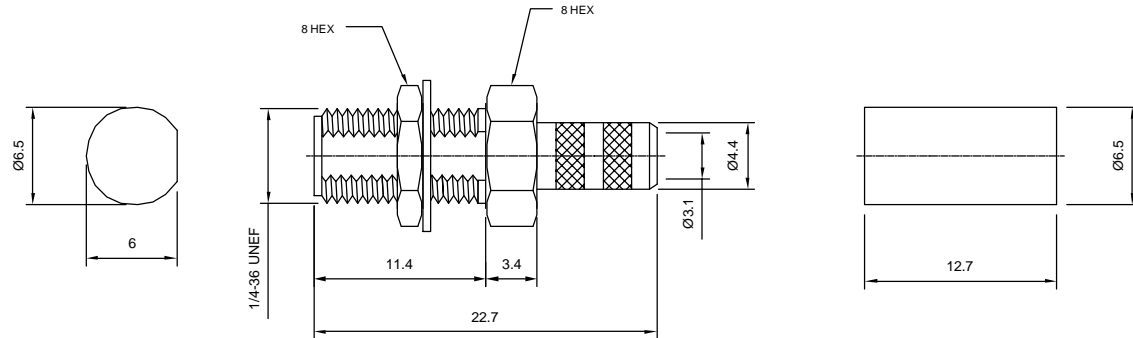

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

	Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117	
	Part Number: LTI-SASF13RGT-58	
Description SMA rear mount bulkhead crimp jack for RG-316		
Scale 3:1	Drawing No. SMA/SASF13R-58	File Name SASF13-58