



RF-LAMBDA

The power beyond expectations

RFLT3W0502G




Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- High power handling capability
- * 3W/2W maximum input when work as combiner.

Electrical Specifications:

Center Frequency Range:	500MHz-2000MHz
Insertion Loss:	0.9dB
Amplitude Unbalance:	± 0.4dB
Phase unbalance:	± 5.0 degree
Isolation:	20dB
Input VSWR:	1.35
Output VSWR:	1.30
Temp. Range:	-10°C~+70°C
Forward Power Handling:	20W (CW)
Reverse Power Handling:	2W (CW)
Connector:	SMA-F
Finishing:	Gray Paint and Epoxy cover

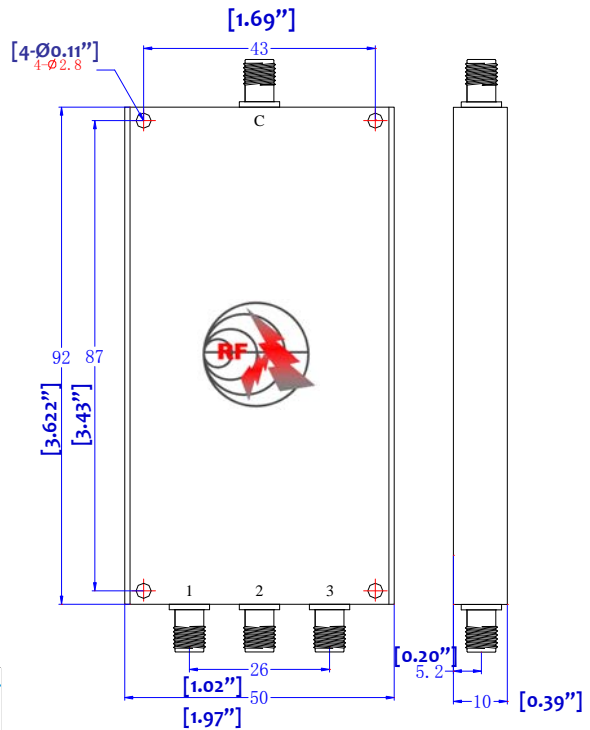

500MHz-2000MHz 3-Way Power Divider

