




$\overline{}$.
\mathbf{V}	
RoHS	
2002/95/EC	

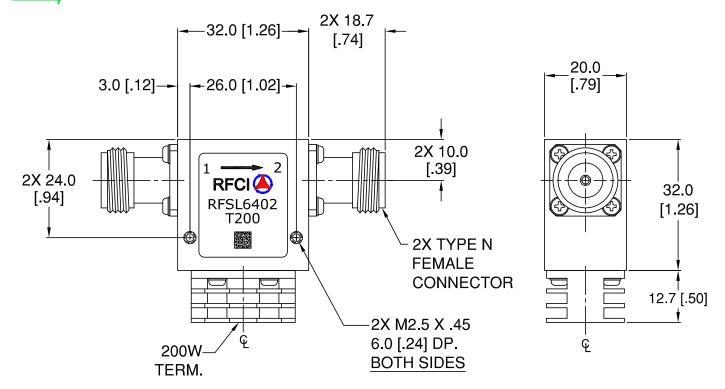

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1400		1700
Insertion Loss (dB)		< .40	.50
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	2.0K/200 Watts
Reverse Power CW	200 Watts
Termination Rating (See note 2)	200 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator held to +85°C; 30 Min. maximum Duration.

Nf 200W ISOLATOR MODEL: RFSL6402-T200

