

ISSUE 4; October 2015

### Description

- High frequency 3.3V surface mount oscillator in a ceramic package, with a hermetically sealed metal lid and LVDS outputs

### Frequency Parameters

- Frequency: 12.0MHz to 800.0MHz
- Frequency Stability:  $\pm 25.00\text{ppm}$  to  $\pm 100.00\text{ppm}$

### Electrical Parameters

- Supply Voltage: 3.3V  $\pm 5\%$

### Operating Temperature Ranges

- 10 to 70°C
- 40 to 85°C

### Output Details

- Output Compatibility: LVDS
- Drive Capability: 100 $\Omega$
- Differential Output Voltage (VOD): 0.33V typ
- Offset Voltage (Vos): 1.25V typ

### Output Control

- Enable/Disable Operation:  
 Logic '0' to pad 2 (<1.7V) enables oscillator outputs  
 Logic '1' to pad 2 (>2.2V) disables oscillator outputs; when disabled the oscillator outputs go to the high impedance state  
 No connection to pad 2 enables oscillator outputs

### Noise Parameters

- Phase Jitter(12kHz to 20MHz): 5ps rms max
- Phase Noise (max): -110dBc/Hz @ 10kHz

### Environmental Parameters

- Storage Temperature Range: -40 to 85°C
- Shock: MIL-STD-202F, Method 213B: 1000G, 0.5ms 1/2 sine wave
- Vibration: MIL-STD-202F, Method 204D, Test Condition D: 20G (10Hz-2000Hz), 4hrs in 3 mutually perpendicular planes (total 12hrs)

### Ordering Information




- Frequency\*  
 Model\*  
 Output  
 Frequency Stability (over operating temperature range)\*  
 Operating Temperature Range\*  
 Supply Voltage  
 (\*minimum required)
- Example:  
 100.0MHz CFPS-63  
 LVDS  $\pm 100\text{ppm}$  -10 to 70C 3.3V

### Compliance

- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



### Outline (mm)




Underside View


### Pad Connections

- N/C
- Enable/Disable
- GND
- Output 1
- Output 2
- +Vs

### Solder Pad Layout



### Test Circuit

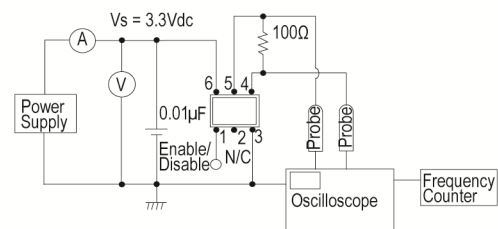

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
 Germany: 0800 1808 443


France: 0800 901 383  
 USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

### Packaging Details

- Pack Style: Bulk      Loose in bulk pack  
Pack Size: 100
- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 1,000

### Wave Form

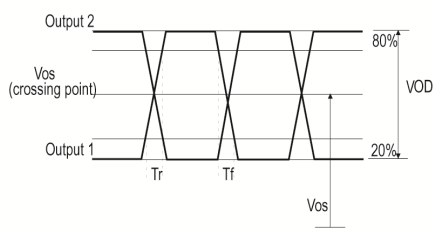

### Electrical Specification - maximum limiting values 3.3V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
12.0MHz	800.0MHz	-10 to 70	±25.0	80	1	45/55
		-40 to 85	±50.0	80	1	45/55

*This document was correct at the time of printing; please contact your local sales office for the latest version.*

[Click to view latest version on our website.](#)

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)