


WAVEGUIDE WR75 20W ATTENUATOR


– RFWAT75W020

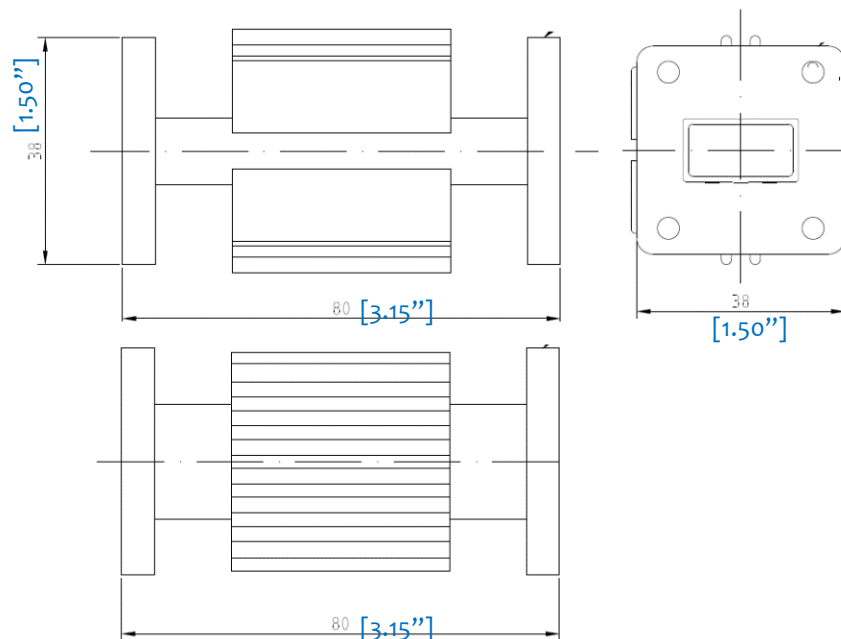

3.0	Electrical Specifications	
3.1	Frequency Range	10.0-15.0GHz
3.2	Power Handle	20W (CW)
3.3	Peak Power	1KW (8us pulse)
3.4	Attenuation	3dB.6dB.10dB.20dB.30dB
3.5	VSWR	1.15:1 (type.)

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR75
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum 0.1kg
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1		DATE	Dec 14th 2004
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	RFWGBP
		RF-LAMBDA	RFPFC
 RFWAT75W020 WAVEGUIDE ATTENUATOR	CAD MODEL REVISION	02	
	ASSEMBLY REVISION	VSDF1	
	ASSEMBLY NAME	RFLVR02	
www.rflambda.com	DRIVING NUMBER	D02-1	
RF-LAMBDA	SIZE	LT	SHEETS
			1 OF 1