



DWG. NO.

REV





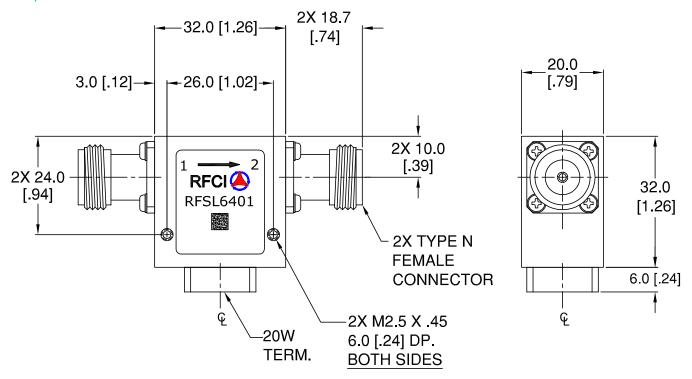

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1350		1850
Insertion Loss (dB)		< .40	.50
Isolation (dB)	17	> 19	
Return Loss (dB)	17	> 19	

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.0K/200 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See note 2)	20 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator held to +85°C; 30 Min. maximum Duration.

Nf 20W ISOLATOR MODEL: RFSL6401

