


## 2200 to 2700MHz 60W – Power Amplifier UIYPA200100C

RF Characteristics @T=25°C, VDD=+28VDC; 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	2200		2700	MHz
Power Output CW	Po	50	60		W
Saturation Output Power		80			
Power Gain @CW	G	47	50		dB
Input Power	Pin		0	5	dBm
Gain Flatness	ΔG		±1.50	±2.0	dB
Input VSWR	S11		1.5:1		
Odd Harmonics @CW	H	-15	-20		dBc
Even Harmonics @CW	H	-20	-25		dBc
Noise Figure	NF		6	8	dB
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC	24	28	30	Volt
Current Consumption @Po=20W	Ib		7.5	8.5	A
Operating Temperature	Tc	-40		+60	°C
Storage Temperature	Tstg	-55		+70	°C
Connector Type	Input SMA Female, Output SMA Female				
<sup>2</sup> Listed are specific frequency ranges and other ranges are available. <sup>2</sup> Please provide the below informations when inquiring and mark * is required. * 1. The specific pass band frequency range * 2. The specific Gain and Power 3. Other special requests.					

### Mechanical Drawing

Note: External heatsink is needed in this module

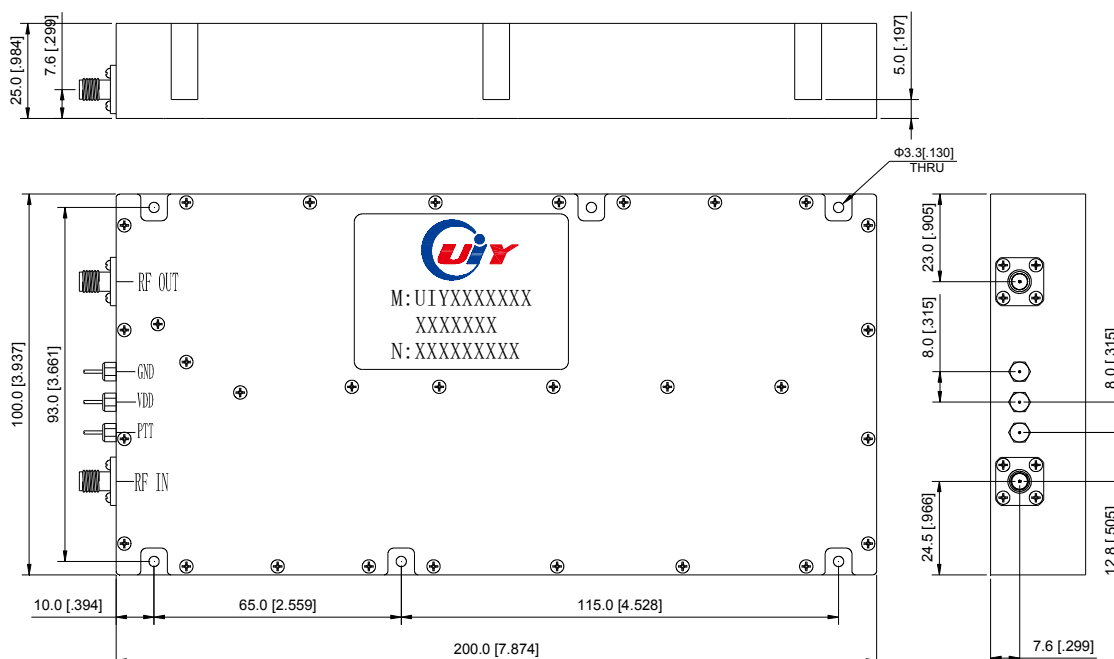

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com