

Surface Mount I&Q Demodulator

50Ω

868 to 895 MHz

SYIQ-895D+



CASE STYLE: TTT1289
PRICE: \$7.95 ea. QTY. (1-9)

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
LO/RF Power	50mW
I&Q Current	40mA


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO (carrier)	2
RF (signal)	1
I (0°)(ref.)	3
Q (90°)*	4
GROUND	5,6,7,8

*Q=+90° for LO<RF
Q=-90° for LO>RF


Outline Drawing

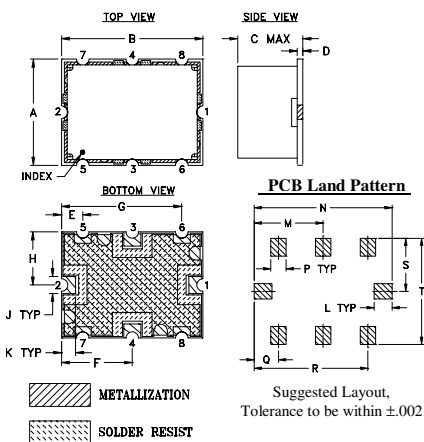

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	
.38	.50	.23	.020	.075	.250	.425	.187	.060	.050	
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.52	1.27	
L	M	N	P	Q	R	S	T		wt.	
.070	.270	.540	.060	.095	.445	.208	.415		grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54		0.8	

Demo Board MCL P/N: TB-459+ Suggested PCB Layout (PL-280)

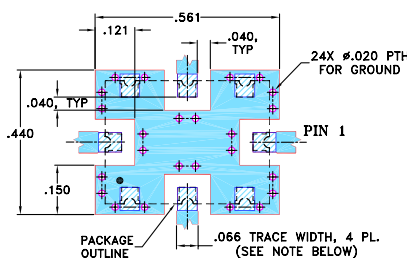

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.4dB typ.
- excellent 3rd and 5th order harmonic suppression
- good amplitude & phase unbalance
- good VSWR all ports, RF 1.35:1 typ., LO 1.3:1 typ., I&Q 1.35:1 typ.
- shielded case

Applications

- cellular
- radar and communication systems


Demodulator Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)		AMPLITUDE UNBALANCE (dB)		PHASE UNBALANCE (Deg.)		HARMONIC SUPPRESSION (-dBc)						
RF (SIGNAL)	LO (CARRIER)	I&Q				with reference to 90°		3XI/Q	5XI/Q					
f _i	f _o	Min.	Max.	σ	Max.	Typ.	Max.	Typ.	Min.					
868	895	DC	5	6.4	0.10	7.5	0.15	0.4	1.5	4.0	45	35	64	50

1. Operating LO power: 10±1dBm
2. 1dB Compression: +5 dBm typical.
3. DC offset, 1.5 mV typ.
4. Conversion Loss= RF power, dBm - (I + Q) power, dBm

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Amplitude Unbalance (dB)	Phase (I&Q) (deg.)	DC Offset (mV)
883.05	0.05	6.37	91.22	1.54
883.76	0.76	6.38	91.25	1.54
884.46	1.46	6.37	91.57	1.53
885.17	2.17	6.37	91.48	1.51
885.88	2.88	6.39	91.28	1.48
886.59	3.59	6.41	91.46	1.42
887.29	4.29	6.43	91.23	1.39
888.00	5.00	6.41	91.31	1.42

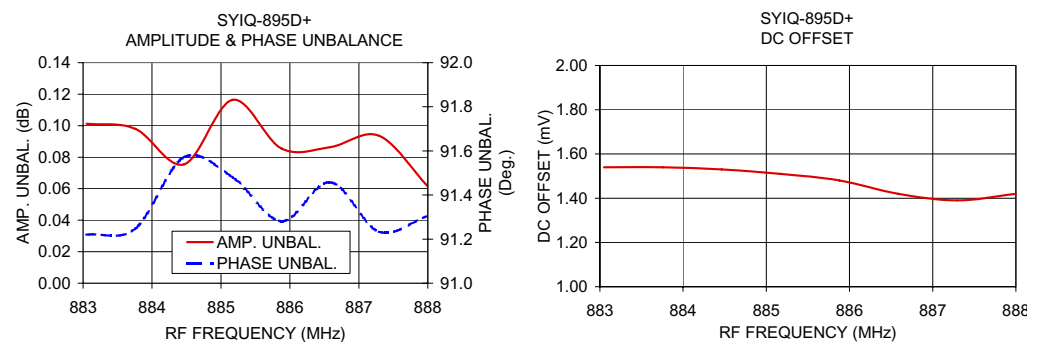

I&Q demodulation block diagram

