





Standards
NF C 96-315
MIL-DTL-3933

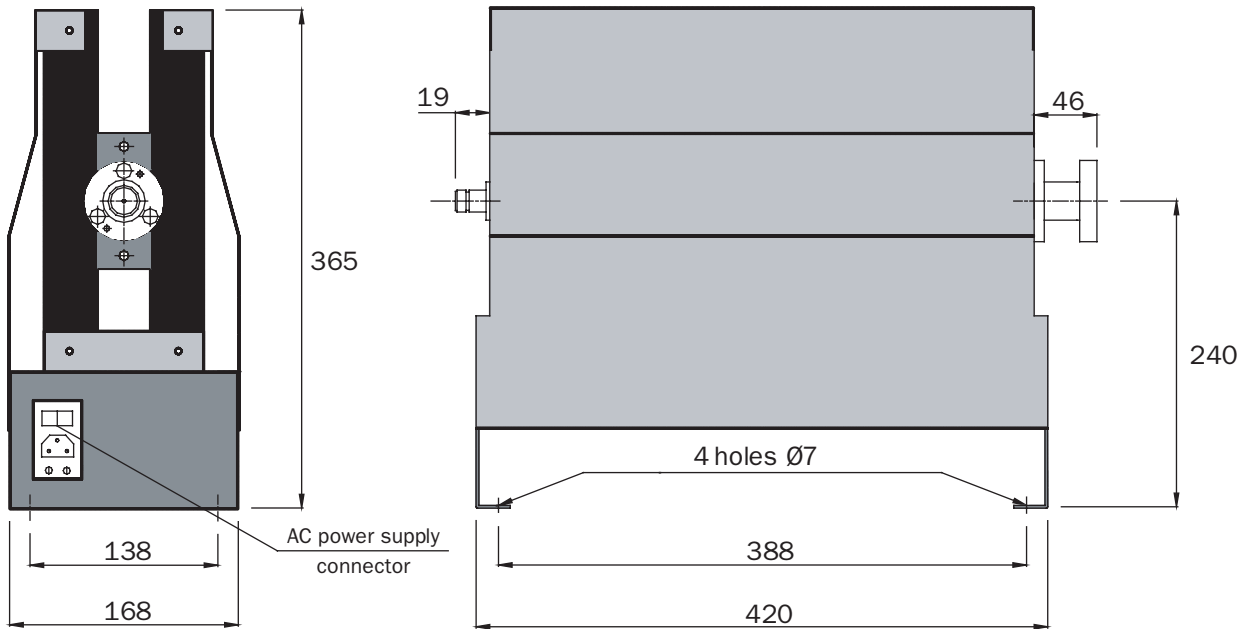

Impedance	50 Ω ± 5%
Frequency	DC - 1 GHz
Max VSWR	≤ 1.30 at 1 GHz
Temperature range	-25 to +55°C
Average power @ 25°C	2 kW
Cooling	Forced air
Weight	22 kg

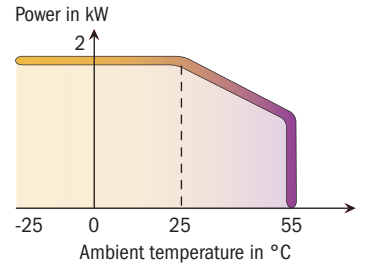

Dimensions in mm

Attenuation (dB)	P/N	Connector	AC power supply	Accuracy ±Δα (dB)
30	16-6553	EIA 7/8" - Nf	220 V - 50/60 Hz	1.5
30	16-6699	7-16f / Nf	220 V - 50/60 Hz	1.5

Others attenuations on request

