






1MHz-200MHz 6-Way Power Divider

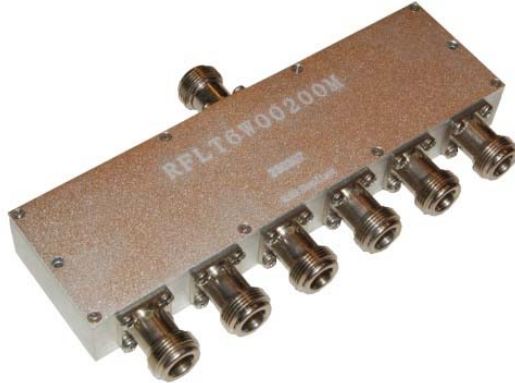

Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- 10W forward power handling capability
- * 2W maximum input when work as combiner.

Frequency Range (MHz)	Insertion Loss		Isolation			Phase Unbalance			Amplitude Unbalance							
	(dB)		(dB)			(degree)			(dB)							
	L	M	L	M	U	L	M	U	L	M	U					
	Typ	Max	Typ	Min	Typ	Typ	Max	Typ	Typ	Max	Typ	Max				
1-200	0.3	0.7	0.8	1.2	35	30	25	20	25	20	4	6	8	0.2	0.3	0.6

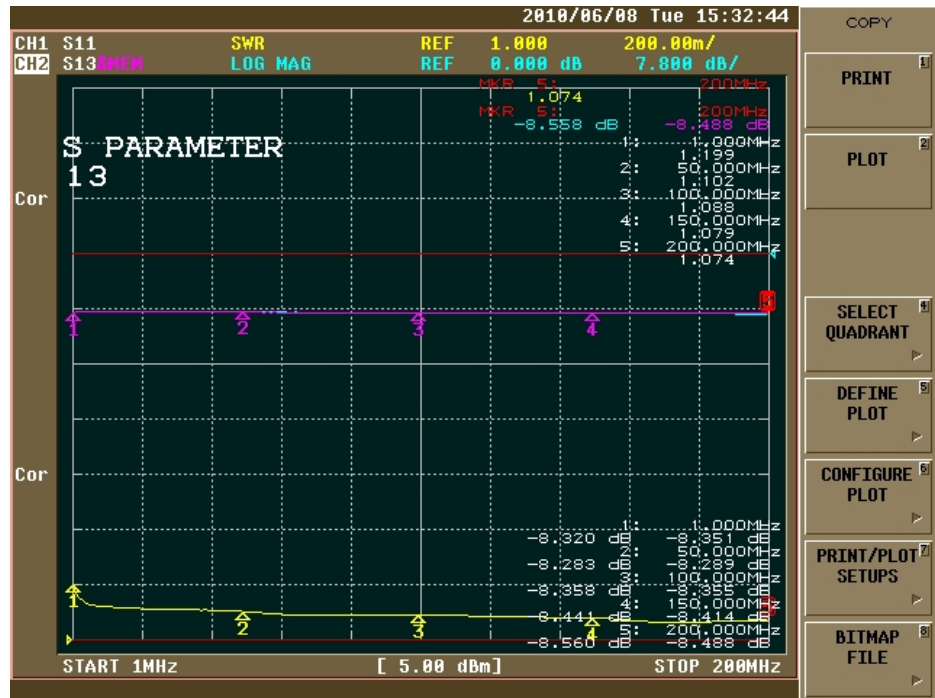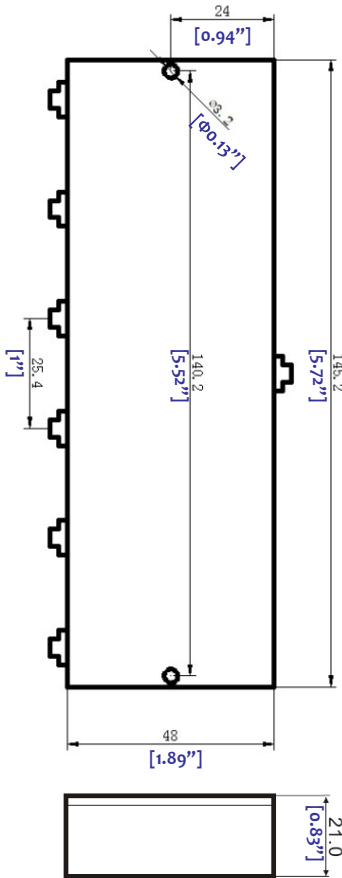

Notes:

1. Case material: Aluminum alloy with Nickel-plating.
2. Connector: N/SMA/BNC/TNC...
3. Temperature -40° C ~+85° C


1MHz-200MHz 6-Way Power Divider



RF-LAMBDA

The power beyond expectations

RFLT6W00200M

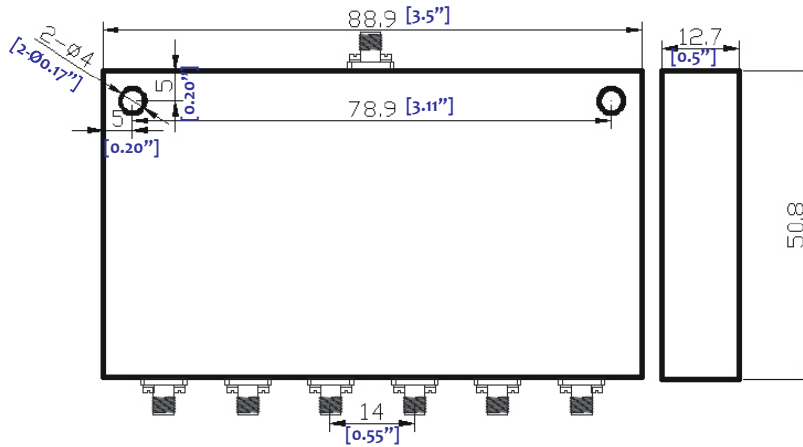

1MHz-200MHz 6-Way Power Divider

