


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

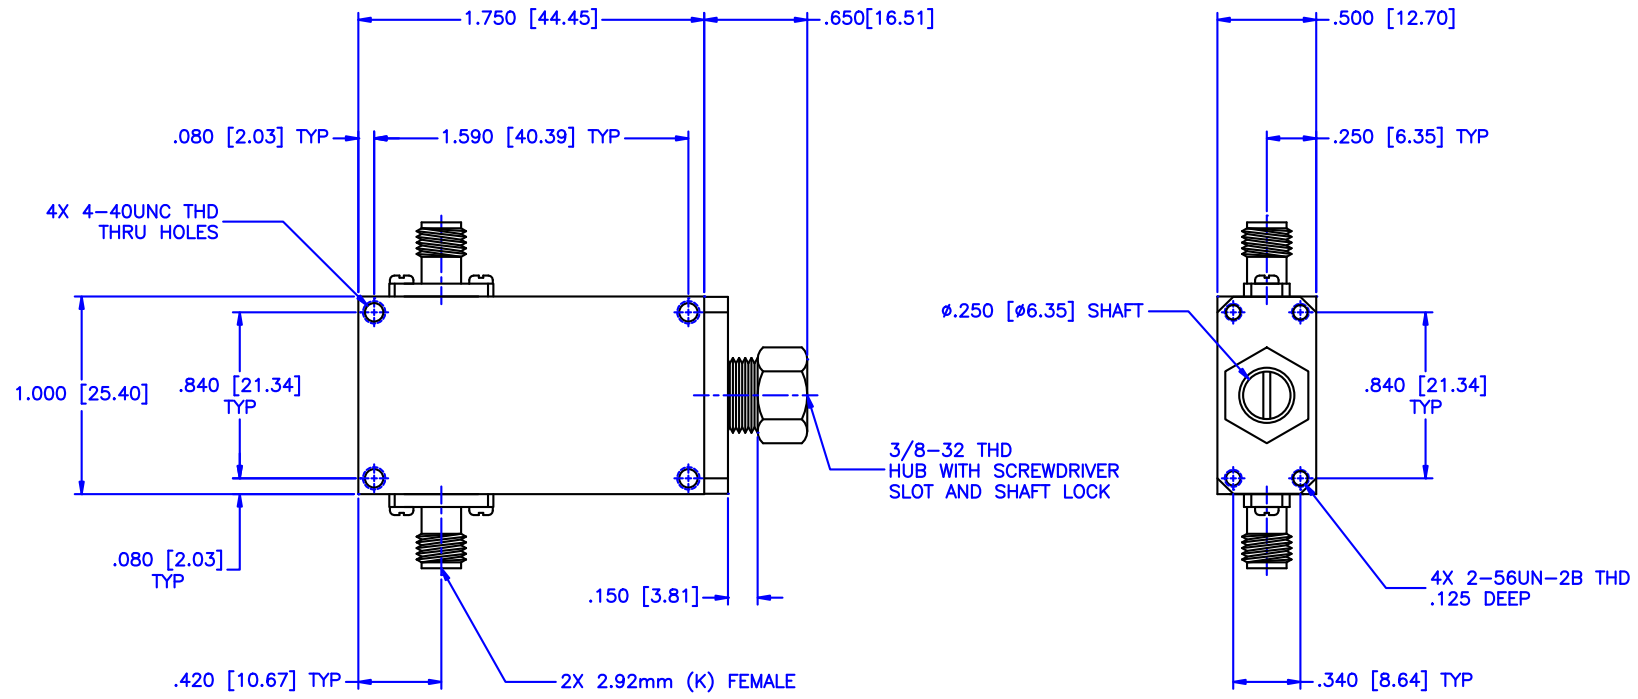

**SPECIFICATION:**

Frequency Range: 26.5-40 GHz  
 Attenuation: 40dB  
 Insertion Loss: 0.5 Max.  
 VSWR: 1.50:1 Max.  
 Power Avg, Peak: 7W, 3kW

**Environmental:**

Temperature range: -55°C to +110°C  
 Shock: 15 G's, 11mS, 1/2 sine  
 Vibration: 3 G's overall  
 Altitude: 40,000 ft. Survival  
 25,000ft Operating

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>CONTINUOUSLY VARIABLE ATTENUATOR</b>		
DRAWN: Paiboon Luekhamhan		PART NO.: CVA32-40		
DATE: 02-08-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: A		REV: N/A
DATE: 02-08-2011		DO NOT SCALE THE DRAWING		DWG NO.: 85452



UNLESS OTHERWISE SPECIFIED:  
TOLERANCES  
IN (INCHES) OR [mm] (MILLIMETERS)  
FRACTIONS: ± 1/64  
DECIMALS: ±.01 ±.005  
ANGLE: ±1/2°

DRAWING TITLE:  
**CONTINUOUSLY VARIABLE ATTENUATOR**

PART NO.: CVA32-40

DRAWN: Paiboon Luekhamhan

DATE: 02-08-2011

DATE: 02-08-2011



CAGE CODE: OD2L5

SIZE: A

REV: N/A

DWG NO.: 85452

DO NOT SCALE THE DRAWING