


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

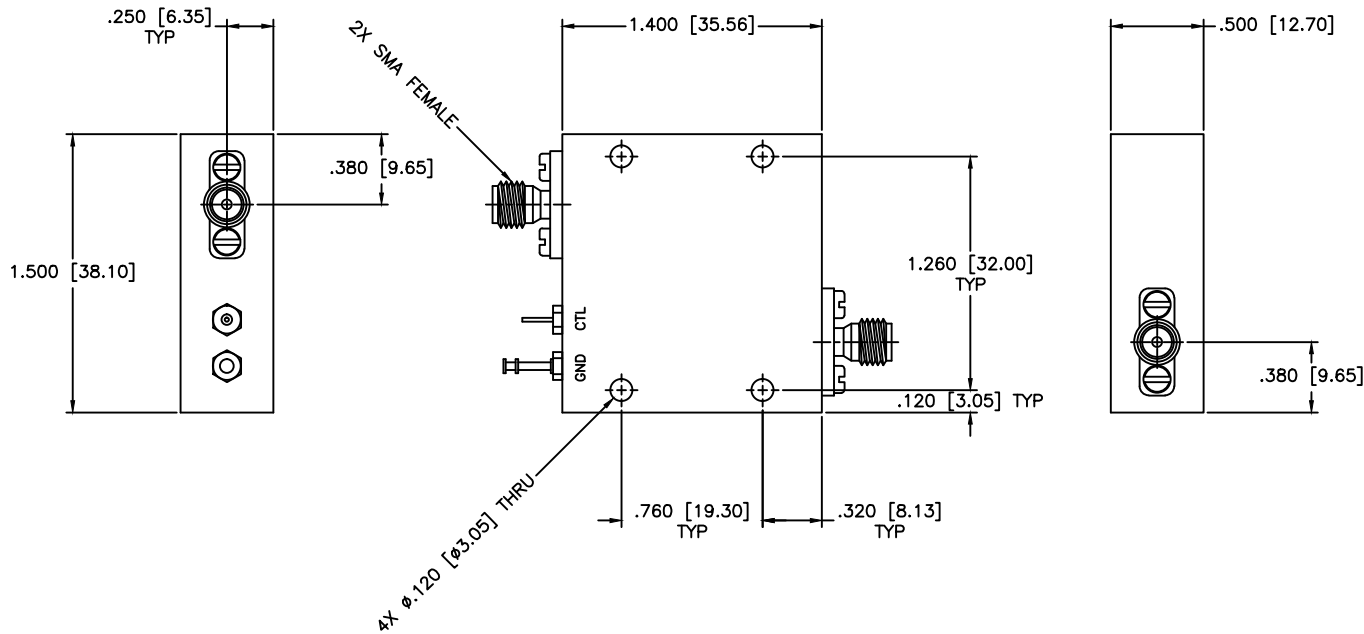

**SPECIFICATIONS**

Frequency Range: 8.0–12.4 GHz  
 Insertion Loss: 4.0dB Max.  
 VSWR: 2.00:1 Max.  
 Attenuation Range: 32dB

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
					SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>VOLTAGE CONTROLLED ATTENUATOR</b>		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. <b>VC-13-32</b>		
DRAWN:	DATE:		CAGE CODE:	SIZE:	REV:	DWG NO.
Patboon Luekhamhan T. Nguyen	11-06-2006 11-06-2006		OD2L5	A	N/A	82698
			DO NOT SCALE THE DRAWING			