


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

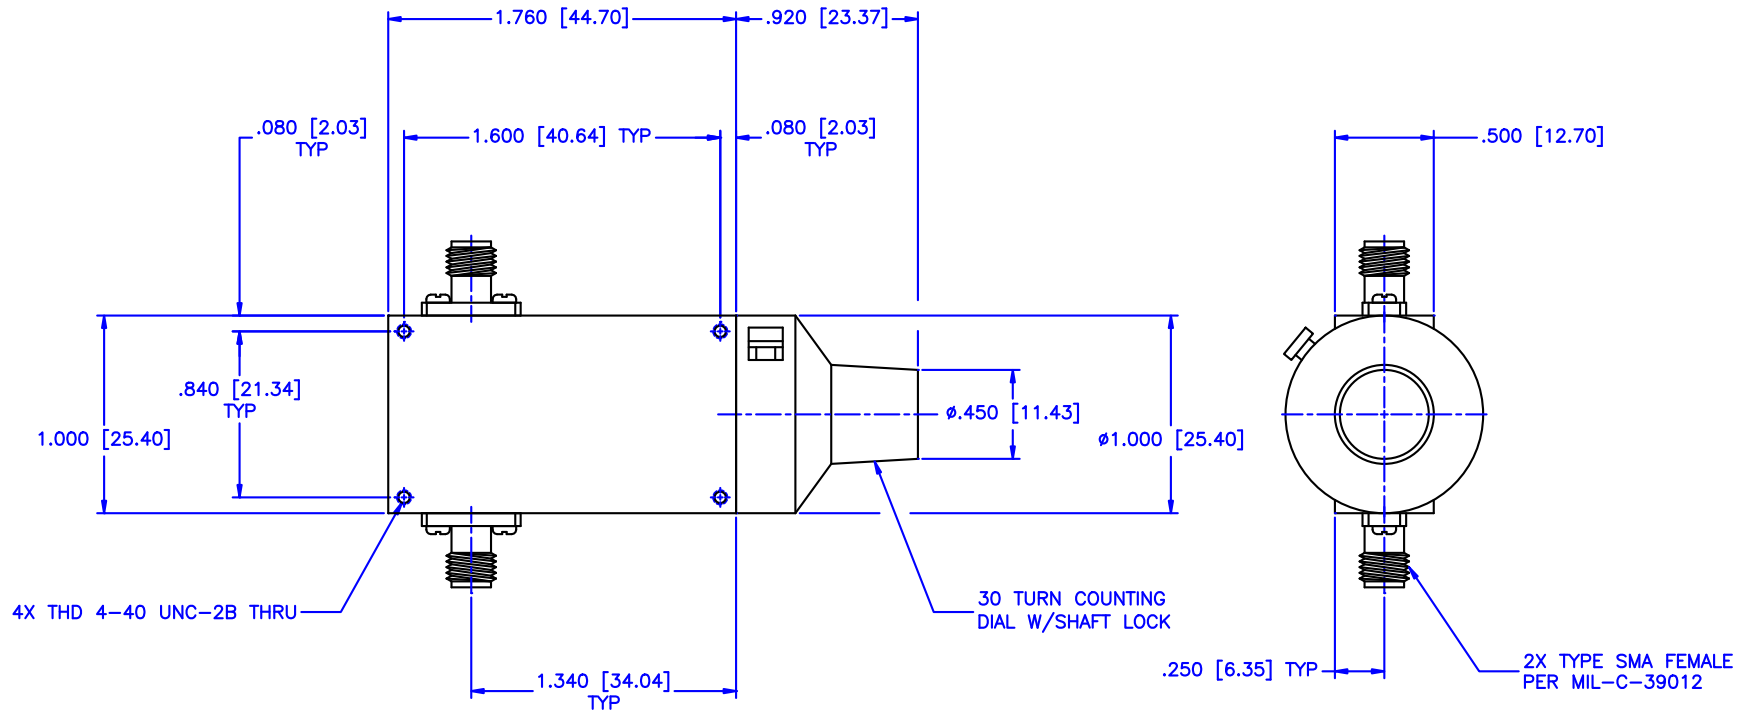

SPECIFICATIONS

Frequency Range: 14–26.5 GHz
 Attenuation: 20dB
 Insertion Loss: 0.75dB Max.
 VSWR: 1.70:1 Max.
 Power Avg, Peak: 7W, 3kW


Environmental
 Temperature range: -55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000 ft. Survival
 25,000ft Operating

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2°		DRAWING TITLE: ATTENUATOR		
DRAWN: Paiboon Luekhamhan		PART NO. CVA14-20/D		
DATE: 08-21-2007	DATE: 08-21-2007	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 08-21-2007	DO NOT SCALE THE DRAWING		DWG NO. 82919



UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.015
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



DRAWING TITLE:
ATTENUATOR

PART NO.
CVA14-20/D

CAGE CODE: OD2L5
 SIZE: A
 REV: N/A
 DO NOT SCALE THE DRAWING
 DWG NO. 82919