

# KR Electronics

## General Description


KR 2792-2 is a 2 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 1.1 MHz and is designed for a source and load impedance of 50 Ω. Other passband frequencies are available. Please consult the factory.

### Features


- 2 MHz Center Frequency
- 50 Ω Source and Load

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div and 200 nsec/div)

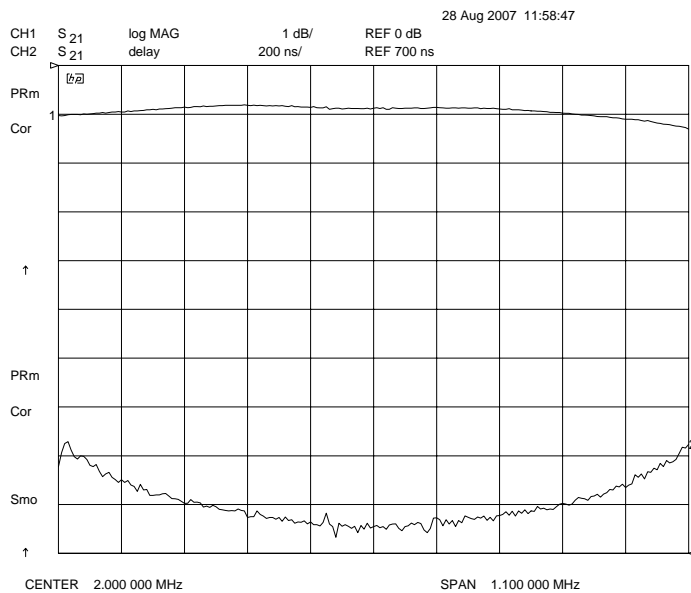

### Overall Response (10 dB/div)

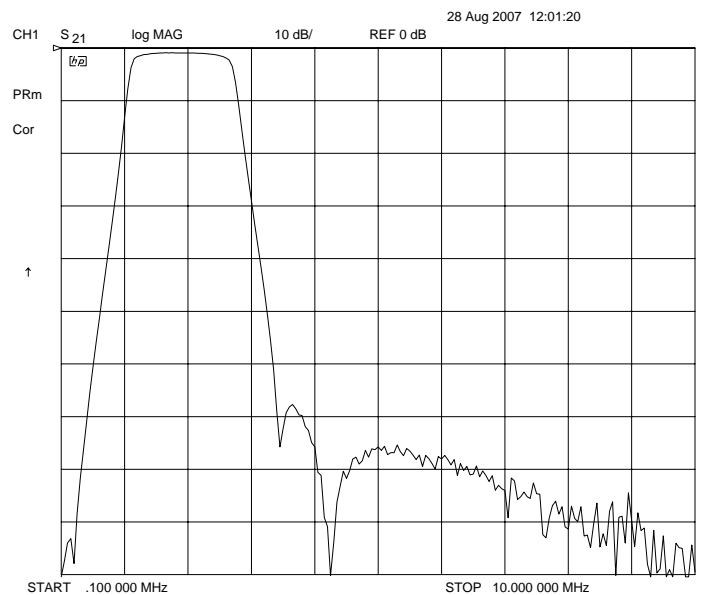

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2792-2

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	2 MHz
Insertion Loss	< 2.5 dB (1 dB typical)
3 dB Bandwidth	1.1 MHz minimum ( 1.6 MHz typical)
Attenuation at 0.35 MHz	> 60 dB
Attenuation at 3.65 MHz	> 60 dB
Source and Load	50 $\Omega$

## Physical Dimensions



Dimensions in inches  
Epoxy Case

