



**Model: SW-P200-2S**

Description:..... SP2T, Reflective, PIN-Switch

Operating Frequency:..... 2 - 20 GHz

Insertion Loss:

2 – 10 GHz	10 - 18 GHz	18 - 20 GHz
1.6 dB Max	2.0 dB Max	2.4 dB Max

Isolation:

2 – 10 GHz	10 - 18 GHz	18 – 20 GHz
70 dB Min	60 dB Min	55 dB Min

VSWR (Path “ON”): ..... 1.8:1 Max  
 Rise/Fall Time (10% to 90% RF, 90% to 10% RF): ..... 10 ns Max  
 On/Off Time (50% TTL to 90% RF, 50%TTL to 10% RF): ..... 50 ns Max  
 Phase Error (Port-to-Port): ..... 12° max  
 Operating Power:..... CW/AVG ..... +30dbm Max  
 ..... Peak ..... 10W @ 1µs-PW Max  
 Control Input Characteristics: ..... TTL /Unit-Load, Floating-High  
 Control Logic:..... 2-Controls, Logic “0” = RF Path “ON”  
 Power Supplies:..... +5(±0.25) V @ 70mA Max  
 ..... -12(±0.5) V @ 50mA Max  
 Connectors (RF): ..... SMA (f), Removable  
 Connectors (Supplies/Controls) ..... Solder Pins  
 Impedance: ..... 50 Ohms Nominal  
 Quality:..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
 Humidity: ..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
 Shock: ..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
 Vibration: ..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)  
 Altitude: ..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
 Temp. Shock: ..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [ +5(±0.25)V / -5(±0.25)V ]
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 & J2 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ COM Port with SMA(M) ]

■ **Control Connectors**

- C1 [ SMC(Jack), 50 Ω ]
- C2 [ SMB(Jack), 50 Ω ]

■ **Control Impedance**

- D1 [ 50 Ω, Internally Terminated ]

■ **Control Function**

- F1 [ Inverse Logic, (“1” = Path “ON”) ]
- F2 [ Single Toggle Control (“1” for J1 path “ON”) ]


■ **Video Suppression Filter**

- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
- G2 [ VF @ J1 & J2 Ports <> 0.25 dB additional Loss ]
- G3 [ VF @ All Ports <> 0.5 dB additional Loss ]



Model: SW-P200-2S

Outline

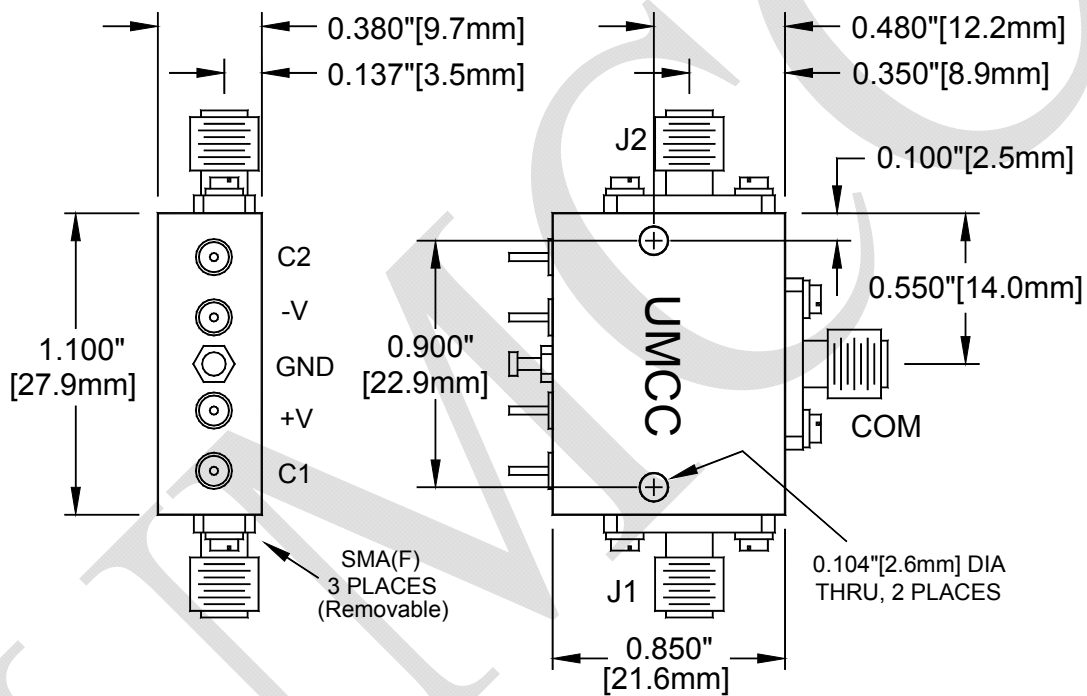

Weight	Tolerances
0.7 oz [19.8 g]	±0.015" [±0.38mm]