


Surface Mount Diplexer

75Ω 50 to 1550 MHz (50-870, 960-1550 MHz)

DPL870-960-75+



CASE STYLE: JK1226
PRICE: \$18.95 ea. QTY (1-9)

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	250mW at 25°C

Note: Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

Pin Connections

COMMON PORT	4
LOW PASS PORT	9
BAND PASS PORT	21
GROUND	1-3,5-8,10-20,22


Outline Drawing

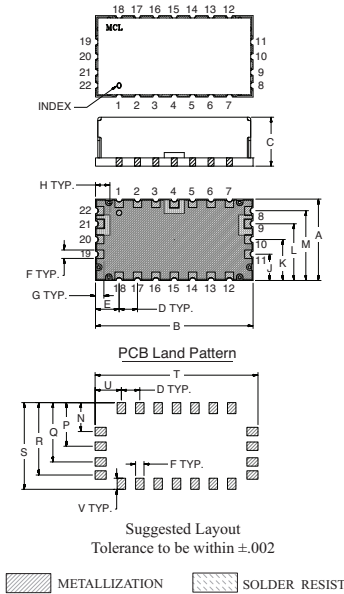

Outline Dimensions (inch/mm)

	A	B	C	D	E	F	G	H	J	K	
	.610	1.181	.375	.138	.177	.063	.063	.108	.197	.307	
	15.49	30.00	9.52	3.50	4.50	1.60	1.60	2.74	5.00	7.80	
	L	M	N	P	Q	R	S	T	U	V	wt.
	.425	.523	.217	.327	.445	.543	.650	1.221	.197	.083	grams
	10.80	13.28	5.51	8.31	11.30	13.79	16.51	31.01	5.01	2.11	9.0

Demo Board MCL P/N: TB-475+ Suggested PCB Layout (PL-286)

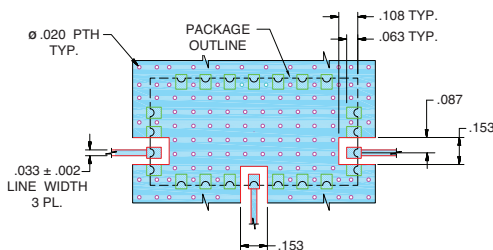

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Low Insertion Loss 0.7dB typ.
- High Isolation 55dB typ.
- 75 Ω Impedance
- Shielded case
- Aqueous washable

Applications

- CATV
- MoCA
- Set-Top Box
- Wire-Line Broadband Access


Electrical Specifications (T_{AMB} = 25°C)

Insertion Loss, dB PASSBAND MHz		Isolation, dB STOPBAND MHz		Cross Over Isolation (dB)	Return Loss (dB)												
50-870	960-1550	960-1550	50-870		Low Pass Port 50-870MHz	Band Pass Port 960-1550MHz	Common Port 50-870MHz 960-1550MHz										
Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.								
0.5	2.5	1.0	2.5	55	30	55	38	35	12	20	12	25	13	20	12	25	12

Typical Performance Data (T_{AMB} = 25°C)

FREQUENCY (MHz)	INSERTION LOSS (dB)		CROSS OVER ISOLATION (dB) (between LPF and BPF)	RETURN LOSS (dB)		
	Low Pass Port	Band Pass Port		Common Port	Low Pass Port	Band Pass Port
50	0.09	61.56	60.96	25.91	25.96	0.02
100	0.14	54.28	54.21	20.37	20.32	0.06
200	0.22	50.23	50.08	17.45	17.58	0.14
300	0.23	48.76	49.10	21.36	21.81	0.25
500	0.39	57.19	56.50	16.98	17.10	0.45
600	0.46	61.37	60.49	17.70	18.19	0.41
700	0.46	52.39	51.55	24.03	24.46	0.38
800	0.76	51.35	51.15	19.59	21.04	0.51
870	1.28	43.61	44.26	25.16	22.97	0.77
900	3.09	25.49	28.55	8.66	7.59	1.20
920	8.11	13.40	20.29	10.29	2.99	2.80
960	50.09	1.69	54.00	16.65	0.55	18.55
1000	45.21	1.17	46.37	20.98	0.39	20.67
1200	66.02	0.73	60.50	33.86	0.30	36.35
1300	59.85	0.71	61.75	44.29	0.26	44.25
1400	59.81	0.81	56.04	22.97	0.28	21.84
1550	52.77	1.01	55.52	45.44	0.22	25.72
1600	54.09	1.32	53.55	15.33	0.27	14.77
2000	42.87	26.35	58.46	0.91	0.26	0.59
3000	42.27	38.29	31.35	1.08	1.77	0.92

Functional Schematic

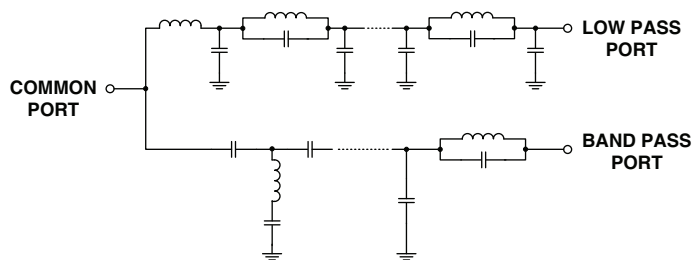

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M118418
EDR-8300/5UF1
DPL870-960-75+
URJ/RAV
121025
Page 1 of 2

