




## Voltage Control Attenuator 1-2GHz 30dB

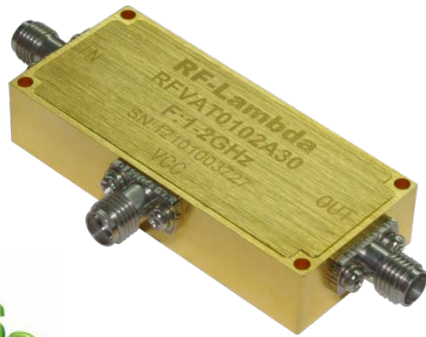

### Features

- Wide Band Operation 1-2GHz
- 30dB Attenuation Range
- DC-10V Biasing Adjustment Range
- Low Supply Current 5mA Typical
- High 1dB Compression Point >+30dBm
- Linear in dB Control Characteristic
- Customization available upon request

RF-Lambda's Voltage Controlled Attenuators provide a broadband range of operation available in 3V, 5V or 10V versions. Our attenuators offer high-linearity suitable for wireless, CATV infrastructure applications.

| Input Port Absorptive Voltage Control Attenuator |                   |      |      |            |               |          |                 |
|--|-------------------|------|------|------------|---------------|----------|-----------------|
| Frequency (GHz)                                  | Insert. Loss (dB) | VSWR | VSWR | Atten (dB) | Flatness (dB) | P1dB (W) | Biasing Voltage |
| 1-2  | 1.2               | 1.5  | 1.5  | 30         | ±1            | 1        | DC-10V<br><10mA |

| Absolute Maximum Ratings |            |
|--------------------------|------------|
| Control Voltage          | DC-10V     |
| Input RF power           | 33dBm      |
| Storage Temperature (C°) | -50 ~ +125 |



| Environment specifications   |                                    |
|------------------------------|------------------------------------|
| Operational Temperature (C°) | -45 ~ +85                          |
| Storage Temperature (C°)     | -50 ~ +125                         |
| Altitude                     | 30,000 ft (Controlled environment) |
| Vibration                    | 10g rms (15 degree 2KHz)           |
| Humidity                     | 100% RH at 35C, 95%RH at 40 deg c  |
| Shock                        | 20G for 11msc                      |




### Mechanical Specification

Case Style: As shown  
 Finishing: Gold plating brass  
 Other finishing available  
 Connector: SMA-F Per MIL-C-39012  
 Seal: Hermetically Sealed  
 Control PIN: 0.02" dia x 0.15" solder pins  
 Weight: 40 grams max.

| Ordering Information |       |                                   |
|----------------------|-------|-----------------------------------|
| Part No              | ECCN  | Description                       |
| RFVAT0102A30         | EAR99 | 1-2GHz Voltage Control Attenuator |


Absorptive Voltage Control Attenuator 30dB 1-2GHz

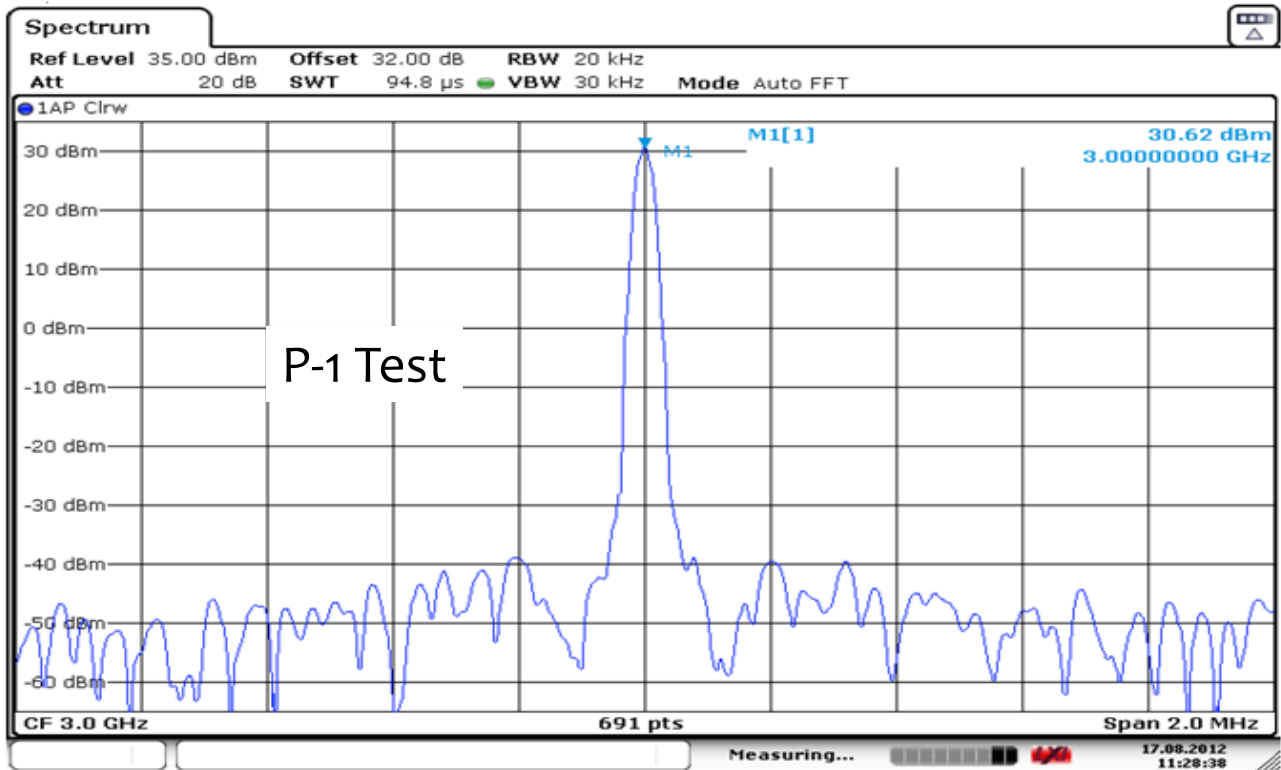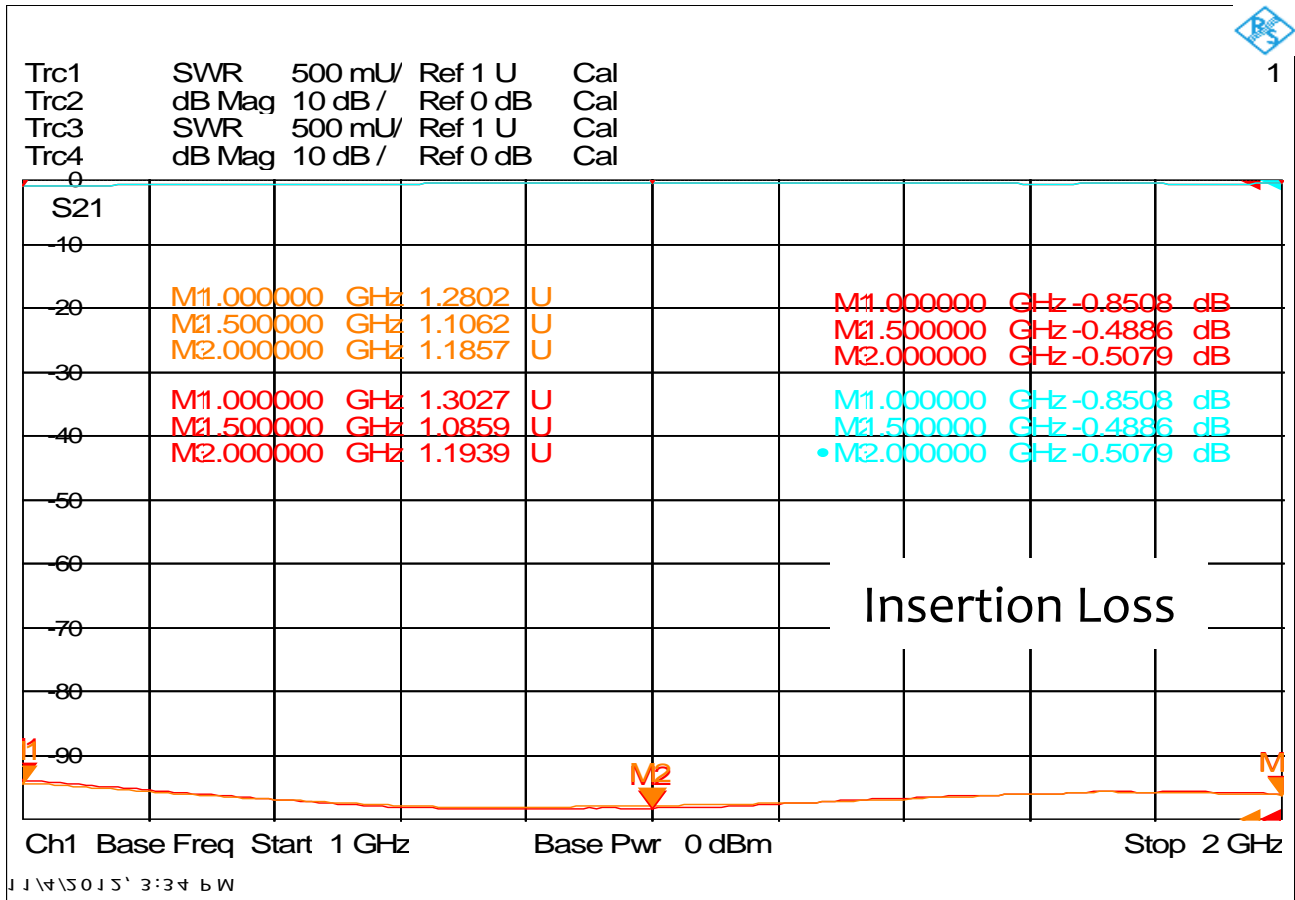

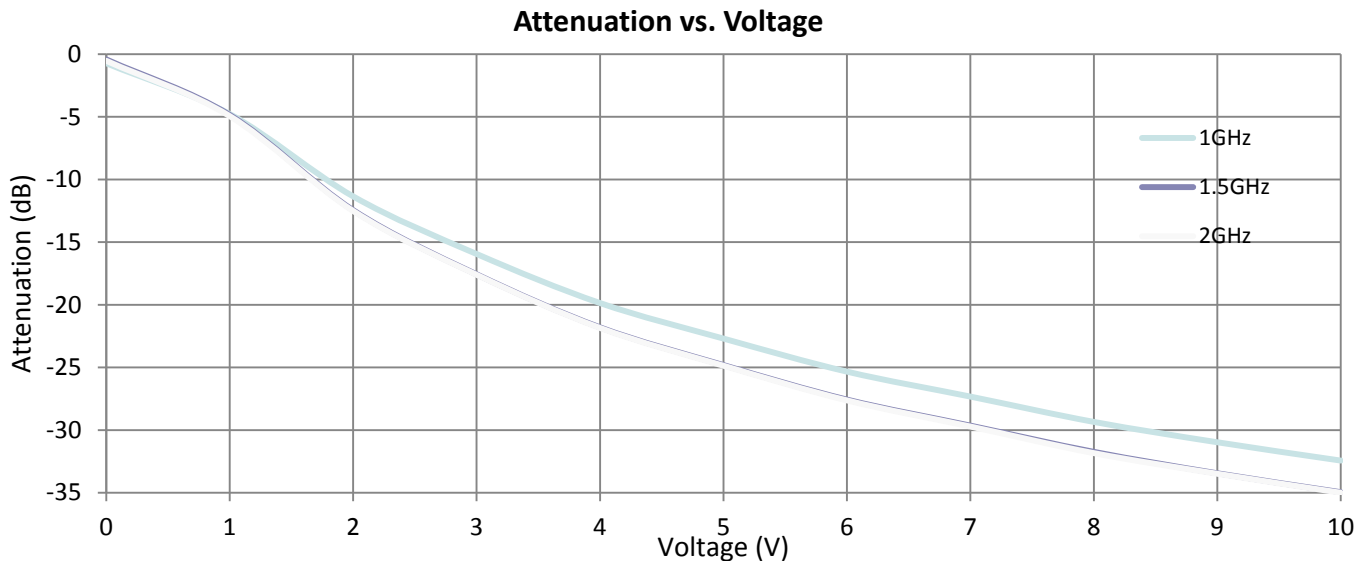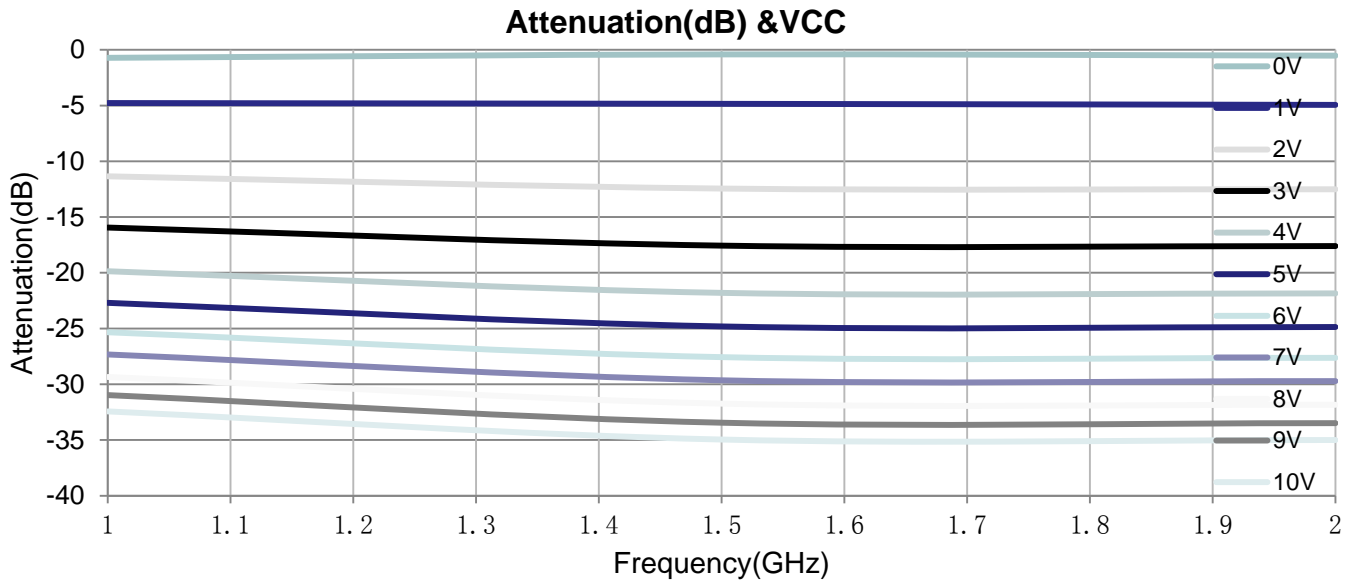
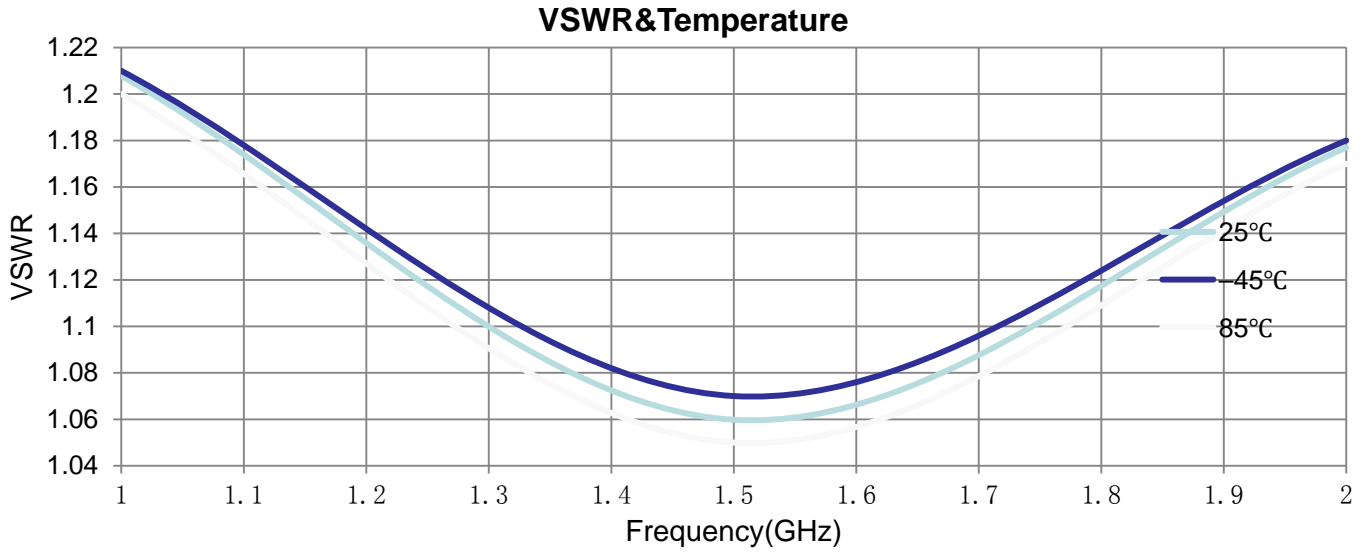




### Input VSWR Vs. Voltage

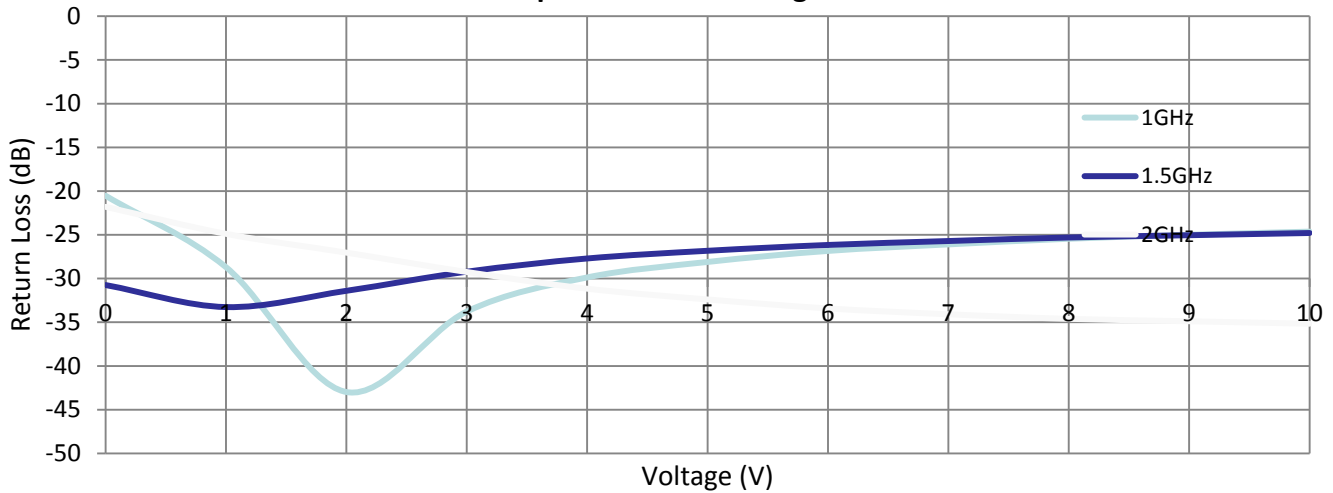

### Output VSWR Vs. Voltage

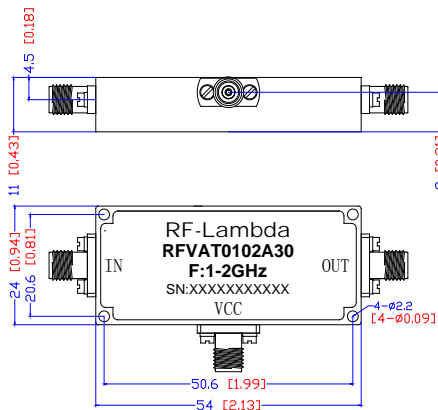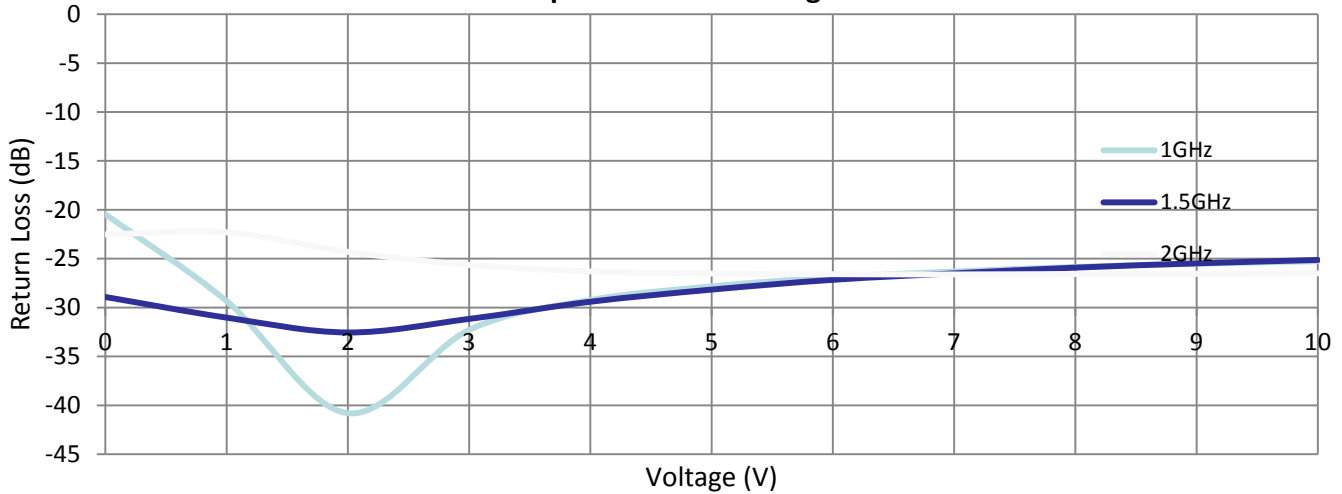

### Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

