


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

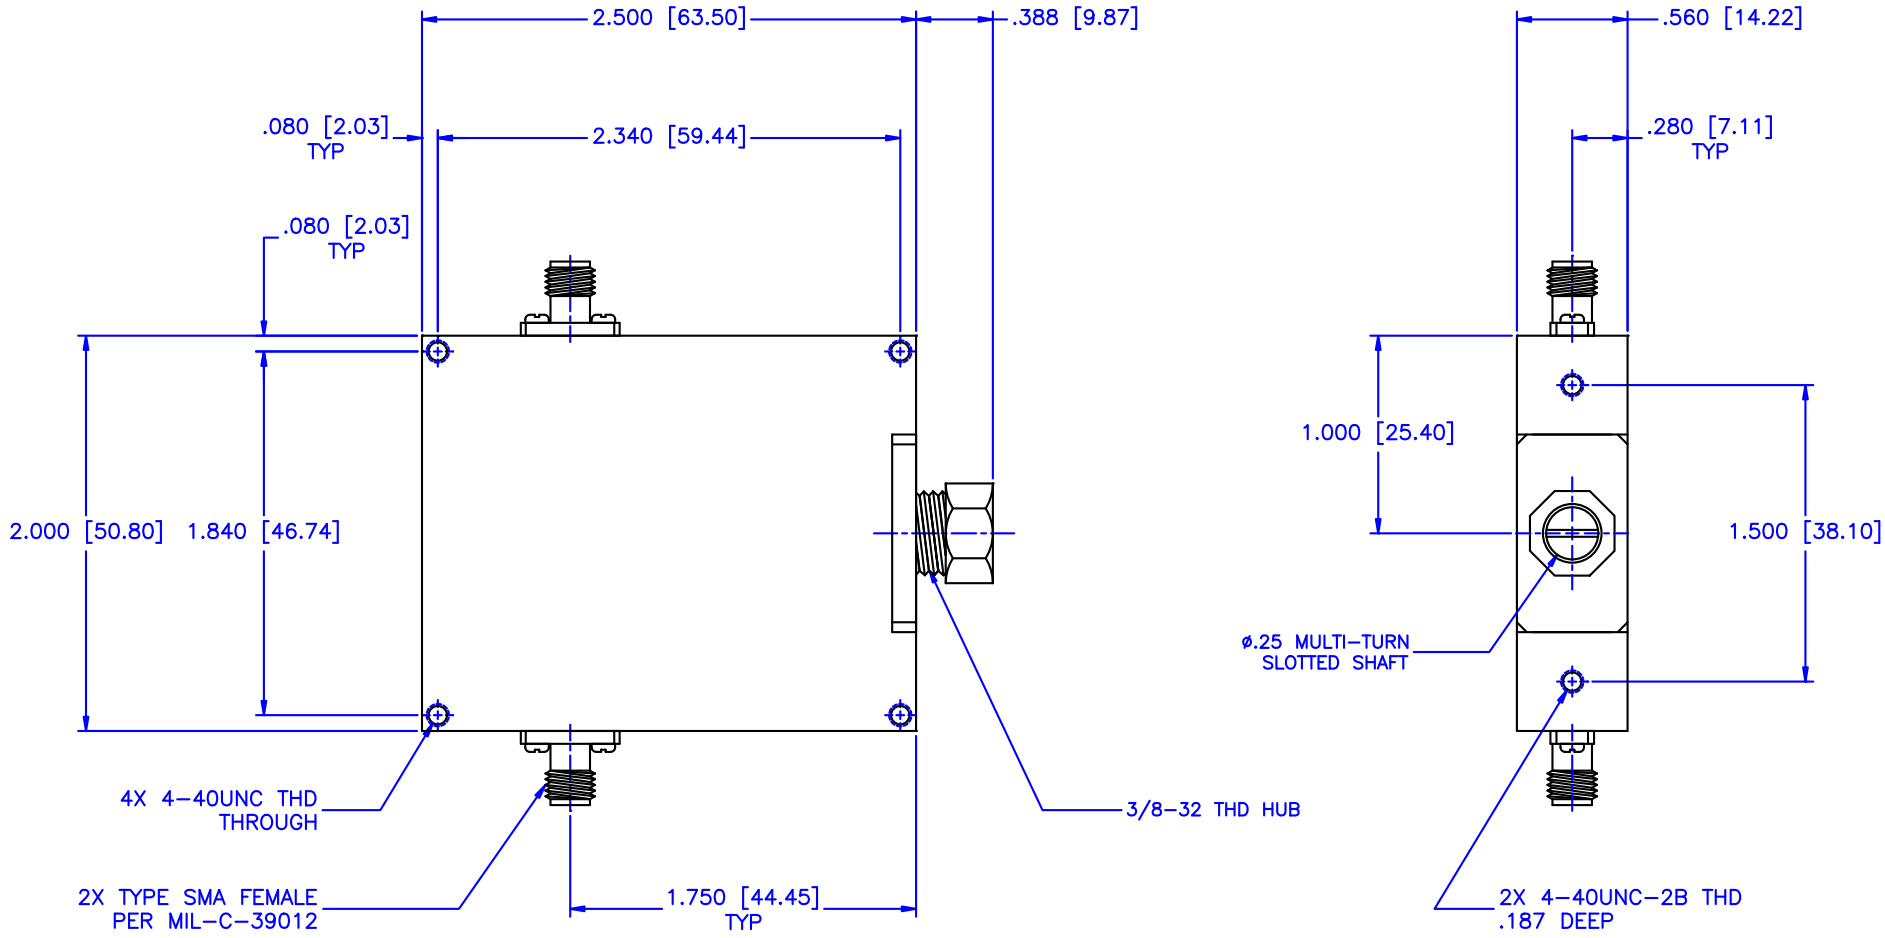

SPECIFICATION:

Frequency Range: 2.8-6.5 GHz
 Attenuation: 20dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 Flatness: ±0.5 dB
 RF Power: 5W Average, 3kW Peak
 Operating Temperature: -55°C to +110°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		ATTENUATOR
DRAWN:		DATE:	PART NO.:		CA18-20	
APPROVED:		DATE:	CAGE CODE:		SIZE:	DWG NO.:
Paiboon Luekhamhan		10-22-2008	OD2L5		A	83956
T. Nguyen		10-22-2008	DO NOT SCALE THE DRAWING		REV:	N/A
			THIRD ANGLE PROJECTION			