




3rd ANGLE PROJECTION



DRAWING TO BE READ IN CONJUNCTION WITH BS 8888

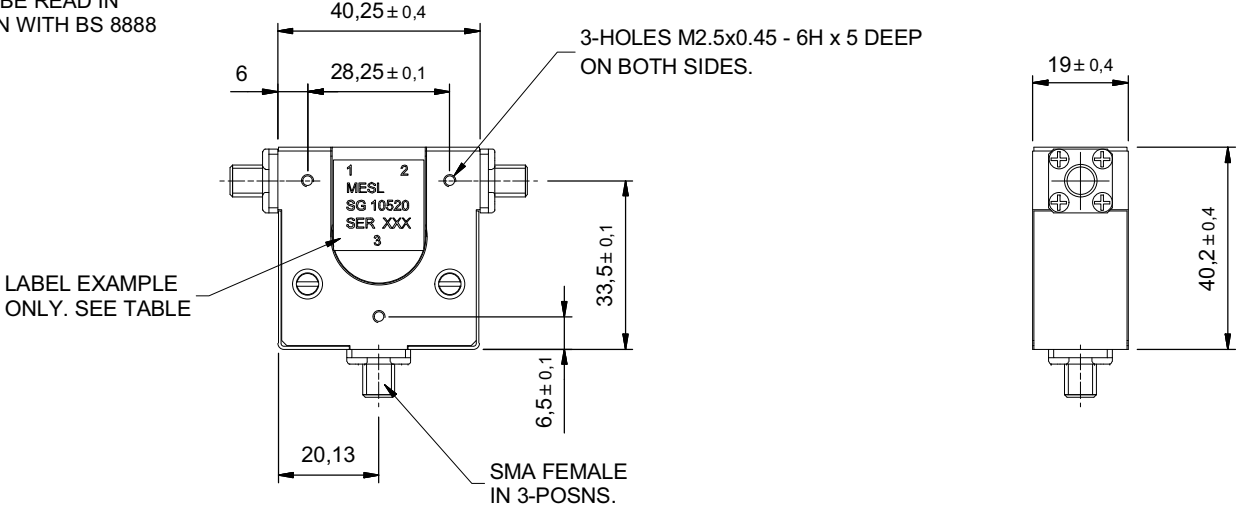

TYPE No.	FREQUENCY (GHz.)	TYPICAL			-10°C to +65°C.		
		INSERTION LOSS (dB Max.)	RETURN LOSS (dB Min.)	ISOLATION (dB Min.)	INSERTION LOSS (dB Max.)	RETURN LOSS (dB Min.)	ISOLATION (dB Min.)
SG 10520	2.0 - 4.0	0.4	20	20	0.5	18	20
SG 10521	2.0 - 2.4	0.3	23	23	0.4	20	20
SG 10522	2.4 - 2.8	0.3	23	23	0.4	20	20

Q.A.
DATE
PROD.REL.
DATE
ENG.APP.
DATE

B	31.03.10	DRN VARIOUS
ISSUE	DATE	MOD NUMBER

NOTES : THIS UNIT IS RoHS COMPLAINT by DESIGN.
LIGHTLY REMOVE ALL BURRS AND SHARP EDGES U.O.S.

THIS DRAWING IS MESL Microwave Ltd. PROPERTY.
IT MAY NOT BE COPIED OR EXHIBITED WITHOUT WRITTEN PERMISSION.

A 3

MECH.ENG. DATE	ORIGINAL SCALE DO NOT SCALE PRINT	MATERIAL	SPECIFICATION	GENERAL TOLERANCE U.O.S. (ISO2768-M) 0 - 6.0 : +0.05 120.0 - 400.0 : ±0.2 6.0 - 30.0 : ±0.1 400.0 - 1000.0 : ±0.3 30.0 - 120.0 : ±0.15 1000.0 - 2000.0 : ±0.5 Angular Dim : ±0.5° Symmetry ±0.05	RESPONSIBLE AUTHORITY	SECURITY CLASSIFICATION
	DRAWN AB. DATE 17/12/09	MASS (kg): N/A DENSITY (g/cm³): N/A	FINISH BODY / LID & : SURTEC 650 ChomitAl. PLATES.	FINISH TO BE 1.6 / U.O.S. DIMENSION IN mm	TITLE 2-4GHz COAXIAL CIRCULATOR OUTLINE TYPE SEE TABLE	CONTRACTORS DRAWING NUMBER 10520 to 10522-000-OL SERVICE DRAWING NUMBER SHEET No. 1 OFF 1