


# LEA-7N

## u-blox 7 GPS/GNSS module

Note: this product is obsolete and not recommended for new designs.

### Highlights

- Multi-GNSS engine for GPS, GLONASS, Galileo and QZSS
- Combines low power consumption and high sensitivity
- UART, USB and DDC (I<sup>2</sup>C compliant) interfaces
- Simple integration with u-blox wireless modules
- 5<sup>th</sup> generation LEA module
- Easy migration from LEA-6 GPS and GLONASS modules

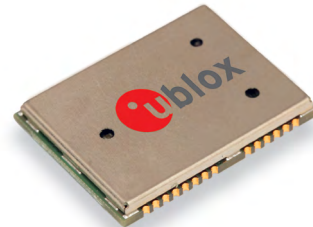

LEA-7N:  
17.0 x 22.4 x 2.4 mm

### Product description

The LEA-7N module delivers multi-GNSS location capability (GPS, GLONASS, Galileo, QZSS and SBAS) together with high performance u-blox 7 positioning technology in the industry proven LEA form factor. The LEA-7N provides exceptional performance with low system power, and is optimized for active antennas.

The LEA-7N features the lowest power GLONASS functionality in the industry and is designed for ERA-GLONASS. This 5<sup>th</sup> generation module in the LEA form factor allows simple migration from LEA-6 GPS and LEA-6N GPS/GLONASS modules. Sophisticated RF-architecture and interference suppression ensure maximum performance even in GPS-hostile environments.

The LEA-7N combines a high level of robustness and integration capability with flexible connectivity options. Future-proof the LEA-7N's internal Flash allows simple firmware upgrades for supporting additional GNSS systems. This makes it perfectly suited to industrial and automotive applications. The DDC (I<sup>2</sup>C compliant) interface provides connectivity and enables synergies with u-blox SARA, LEON and LISA wireless modules. For RF optimization the LEA-7N features a front-end SAW filter for increased jamming immunity.

u-blox 7 modules use GPS/GNSS chips qualified according to AEC-Q100 and are manufactured in ISO/TS 16949 certified sites. Qualification tests are performed as stipulated in the ISO16750 standard: "Road vehicles – Environmental conditions and testing for electrical and electronic equipment".

### Product selector

Model	Type	Supply	Interfaces	Features
LEA-7N	<ul style="list-style-type: none"> <li>• GPS / QZSS</li> <li>• GLONASS</li> <li>• Galileo</li> <li>• BeiDou</li> <li>• Timing &amp; Frequency</li> <li>• Dead Reckoning</li> <li>• Precise Point Positioning</li> </ul>	<ul style="list-style-type: none"> <li>• 1.65 V – 3.6 V</li> <li>• 2.7 V – 3.6 V</li> <li>• Lowest power (DC/DC)</li> </ul>	<ul style="list-style-type: none"> <li>• UART</li> <li>• USB</li> <li>• SPI</li> <li>• DDC (I<sup>2</sup>C compliant)</li> </ul>	<ul style="list-style-type: none"> <li>• Programmable (Flash)</li> <li>• Data logging</li> <li>• Extra front-end LNA</li> <li>• Front-end SAW filter</li> <li>• RTC crystal</li> <li>• Internal oscillator</li> <li>• Antenna supply</li> <li>• Antenna short circuit detection / protection</li> <li>• Antenna open circuit detection pin</li> <li>• Timepulse output</li> <li>• External interrupt / Wakeup</li> </ul>

C = Crystal / T = TCXO  
R = Galileo ready

## Features

Receiver type	56-channel u-blox 7 engine GPS L1 C/A, GLONASS L1 FDMA, QZSS L1 C/A, Galileo E1B/C ready SBAS: WAAS, EGNOS, MSAS		
Navigation update rate	up to 10 Hz		
Accuracy	Position	GPS 2.5 m CEP	GLONASS 4.0 m
	SBAS	2.0 m CEP	n.a.
Acquisition	Cold starts:	29 s	30 s
	Aided starts:	5 s	n.a.
	Reacquisition:	1 s	3 s
Sensitivity	Tracking:	-162 dBm	-158 dBm
	Cold starts:	-148 dBm	-140 dBm
	Warm starts:	-148 dBm	-145 dBm
Assistance	AssistNow Online AssistNow Offline AssistNow Autonomous OMA SUPL & 3GPP compliant		
LNA	Built-In		
Oscillator	TCXO		
RTC crystal	Built-In		
Anti jamming	Active CW detection and removal		
Memory	Flash		
Supported antennas	Active and passive		

## Electrical data

Supply voltage	2.7 V to 3.6 V
Power Consumption	69 mW @ 3 V (Continuous) 30 mW @ 3 V Power Save mode (1 Hz)
Backup Supply	1.4 to 3.6V

## Interfaces

Serial interfaces	1 UART 1 USBV2.0 full speed 12 Mbit/s 1 DDC (I <sup>2</sup> C compliant)
Digital I/O	Configurable timepulse 1 EXTINT input for Wakeup
Timepulse	Configurable 0.25 Hz to 1 kHz
Protocols	NMEA, UBX binary, RTCM

### Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit [www.u-blox.com](http://www.u-blox.com).


Copyright © 2013, u-blox AG

Objective Specification

## Package

28 pin LCC (Leadless Chip Carrier): 17.0 x 22.4 x 2.4 mm, 2.1 g

Pinout

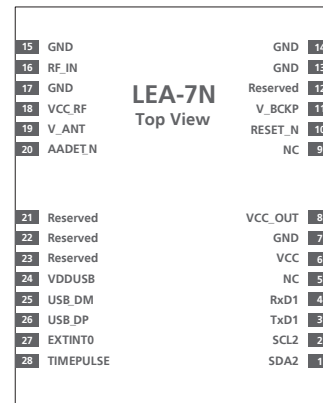

## Environmental data, quality & reliability

Operating temp. -40° C to 85° C

Storage temp. -40° C to 85° C

RoHS compliant (lead-free)

Qualification according to ISO 16750

Manufactured in ISO/TS 16949 certified production sites

## Support products

u-blox 7 Evaluation Kits:

Easy-to-use kits to get familiar with u-blox 7 positioning technology, evaluate functionality, and visualize GPS/GNSS performance.

EVK-7N: u-blox 7 GPS/GNSS Evaluation Kit, with TCXO

## Ordering information

LEA-7N-0 u-blox 7 GPS/GNSS Module, Flash, TCXO, SAW, 17.0 x 22.4 x 2.4 mm, 250 pcs/reel

Available as samples and tape on reel

## Contact us

For contact information, see [www.u-blox.com/contact-us](http://www.u-blox.com/contact-us).