






Standards
NF C 96-315
MIL-DTL-3933

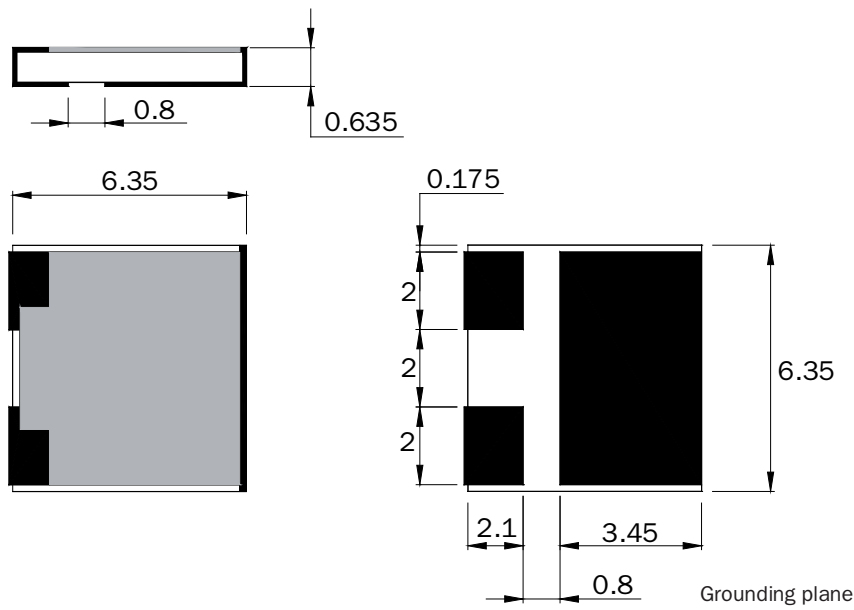

Substrate	AIN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Tin over Nickel barrier

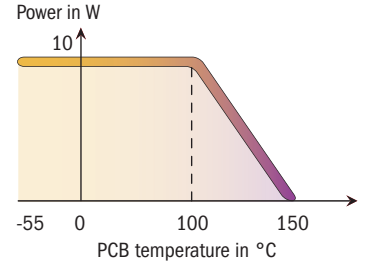

Dimensions in mm

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm\Delta\alpha$ (dB)
45-0022S	0.5	3.5	10	50	1.25	0.2
45-0021S	1	3.5	10	50	1.25	0.2
45-0023S	2	3.5	10	50	1.25	0.3
45-0076S	3	3.5	10	50	1.25	0.3
45-0077S	4	3.5	10	50	1.25	0.3
45-0039S	8	3.5	10	50	1.25	0.6
45-0064S	10	3.5	10	50	1.25	0.6

mm	inch
0.175	0.007
0.635	0.025
0.8	0.031
2	0.079
2.1	0.083
3.45	0.136
6.35	0.250

* Others values on request

Available on Tap and Reel Packaging

