



Model: AT-H800-HD

Table with specifications: Description, Operating Frequency, Insertion Loss, Attenuation Range, Attenuation Flatness, Control Function, Transfer Function Accuracy, VSWR, Settling Time, Power Handling, Connectors, Connector, Temperature Coefficient, Power Supply, Impedance, Quality.

Environmental Ratings:

Table with environmental ratings: Temperature, Humidity, Shock, Vibration, Altitude, Temp. Shock.

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)


- RF Connectors (B1, B2), Control Function Resolution (E1, R1, E2, R2, E3), Transfer Functions (F3), Attenuation <> Limited Range (G1)



Model: AT-H800-HD

**Outline**

("A" = 0.515" [13.1mm] <> Tolerances: ±0.015" [0.38mm] <> Weight = 2.4 oz [68g])

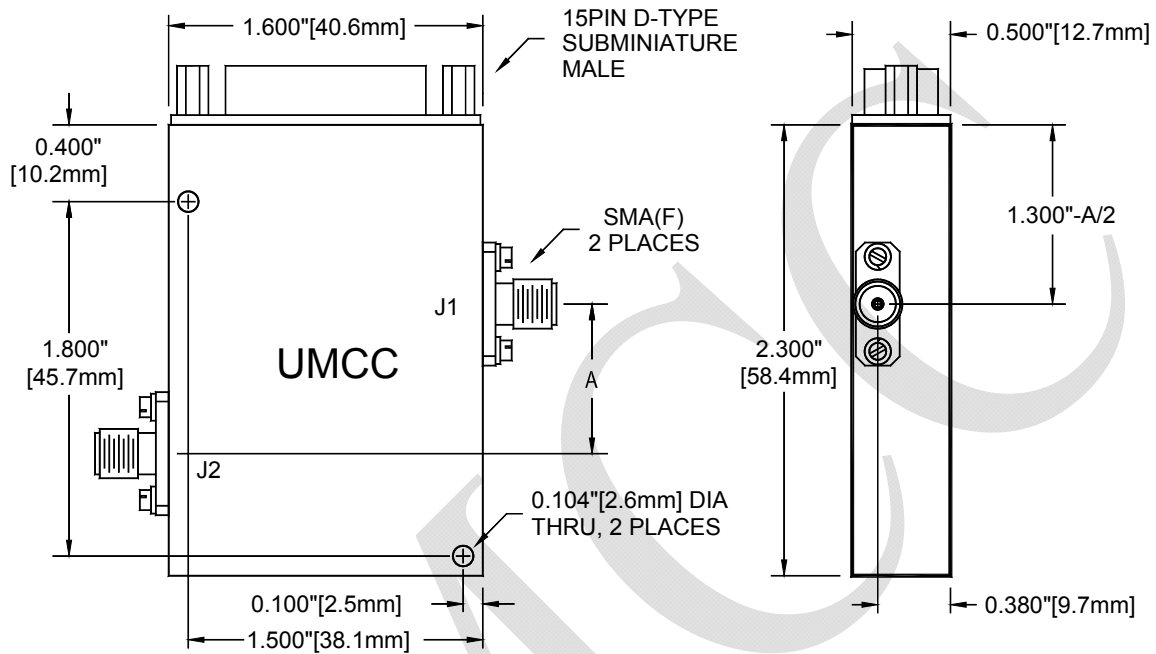

**Pin-Out Function**

PIN	Function
1	N/C
2	N/C
3	N/C
4	0.25 dB
5	0.5 dB
6	1.0 dB
7	2.0 dB
8	4.0 dB
9	8.0 dB
10	16.0 dB
11	32.0 dB
12	64.0 dB
13	+VDC
14	-VDC
15	GND (Chassis & Digital)

