



ISSUE 5; August 2014 - RoHS 2011/65/EU

Description

- Surface mount temperature compensated crystal oscillator (TCXO) providing a high degree of frequency stability over a wide temperature in a hermetically sealed ceramic package and is suitable for GPS applications



Frequency Parameters

- Frequency 16.32MHz to 33.6MHz
- Frequency Stability $\pm 0.50\text{ppm}$
- Ageing $\pm 1\text{ppm}$ typical in 1st year @25°C

Electrical Parameters

- Supply Voltage 3.0V $\pm 10\%$
- Current Draw (Typical): 2mA @ 20MHz
- Supply Voltage Variation: $\pm 0.2\text{ppm}$
- Load Variation: $\pm 0.2\text{ppm}$ (10k Ω // 10pF)
After Reflow: $\pm 1.0\text{ppm}$

Operating Temperature Ranges

- -40 to 85°C

Output Details

- Output Compatability Clipped Sine
- Drive Capability 10k Ω // 10pF
- Output Waveform: 0.8 Vpk-pk min, DC-Coupled

Environmental Parameters

- Shock: IEC 60068-2-27, Test Ea: 980m/s² acceleration for 6ms, 3 shocks in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc, Procedure B4: 10Hz-60Hz 1.5mm displacement, 60-2000Hz at 98.1m/s², 30mins in 3 mutually perpendicular planes at 1 oct/min
- Solderability: MIL-STD-202, Method 208, Category 3
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Soldering: Suitable for Convection Reflow soldering. Peak temperature 260°C for 10sec max
- Washing: Able to withstand aqueous washing

Ordering Information


- Frequency*
Model*
Output
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Supply Voltage
- Example
26.0MHz CFPT-127
Clipped Sine $\pm 0.5\text{ppm}$ -40 to 85C 3V

Compliance


- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



Outline (mm)

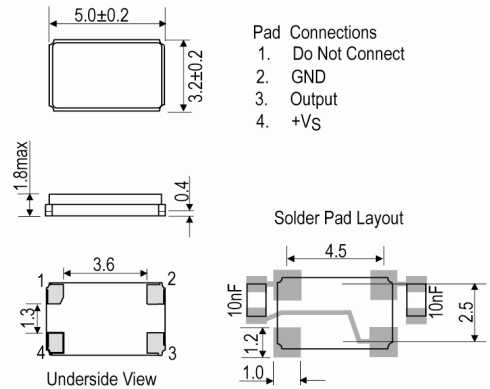

Test Circuit

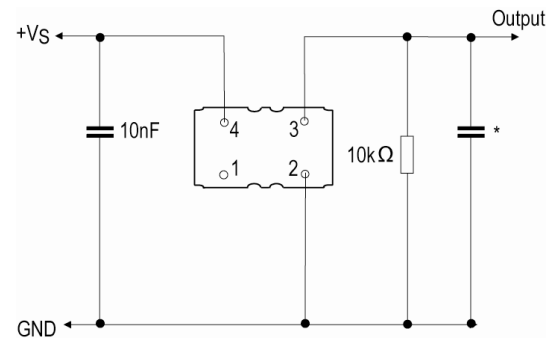

*10k Ω // 10pF (Clipped Sinewave), inclusive of probe and jig capacitance.

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: info@iqdfrequencyproducts.com

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: www.iqdfrequencyproducts.com



Packaging Details

- Pack Style: Cutt In tape, cut from a reel
Pack Size: 1
- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values 3.0V ±10%

Frequency Min	Frequency Max	Temperature Range	Stability (min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
16.32MHz	16.32MHz	-40 to 85	±0.5	-	-	-
16.8MHz	16.8MHz	-40 to 85	±0.5	-	-	-
19.2MHz	19.2MHz	-40 to 85	±0.5	-	-	-
24.5535MHz	24.5535MHz	-40 to 85	±0.5	-	-	-
26.0MHz	26.0MHz	-40 to 85	±0.5	-	-	-
33.6MHz	33.6MHz	-40 to 85	±0.5	-	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
 USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com