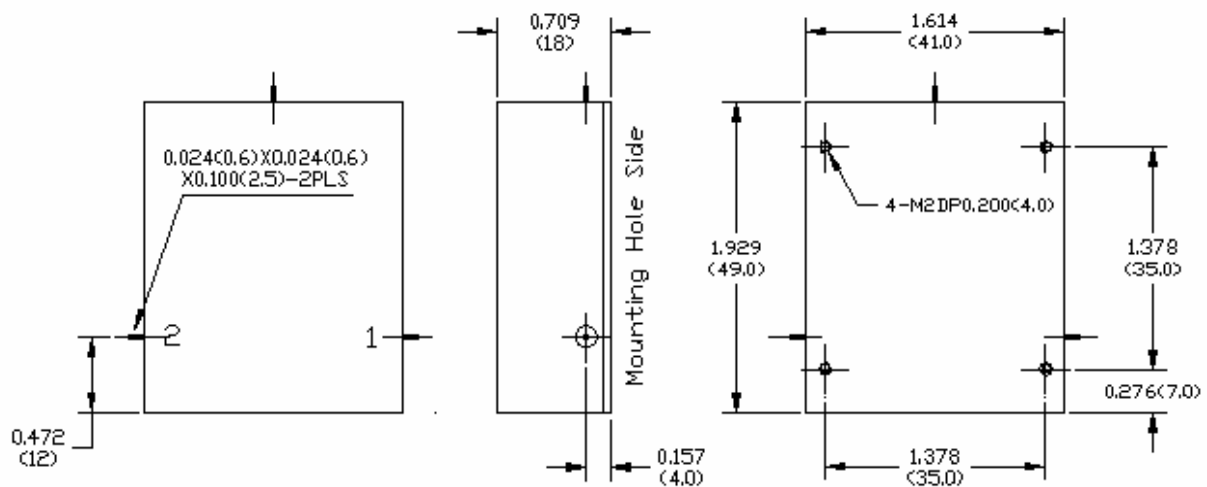


Key Features:

- Frequency range: 470~862MHz, full bandwidth or partial bandwidth
- Small size, low cost
- 50 ohm Drop-in Pin connection
- Power handling +15 Watts CW Maximum,
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth for narrower bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1832-0666-59	470-862	1.2 Max	≥ 15	≤ 1.50	15	-40 ~ +70

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2132-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency X.XXX GHz