


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

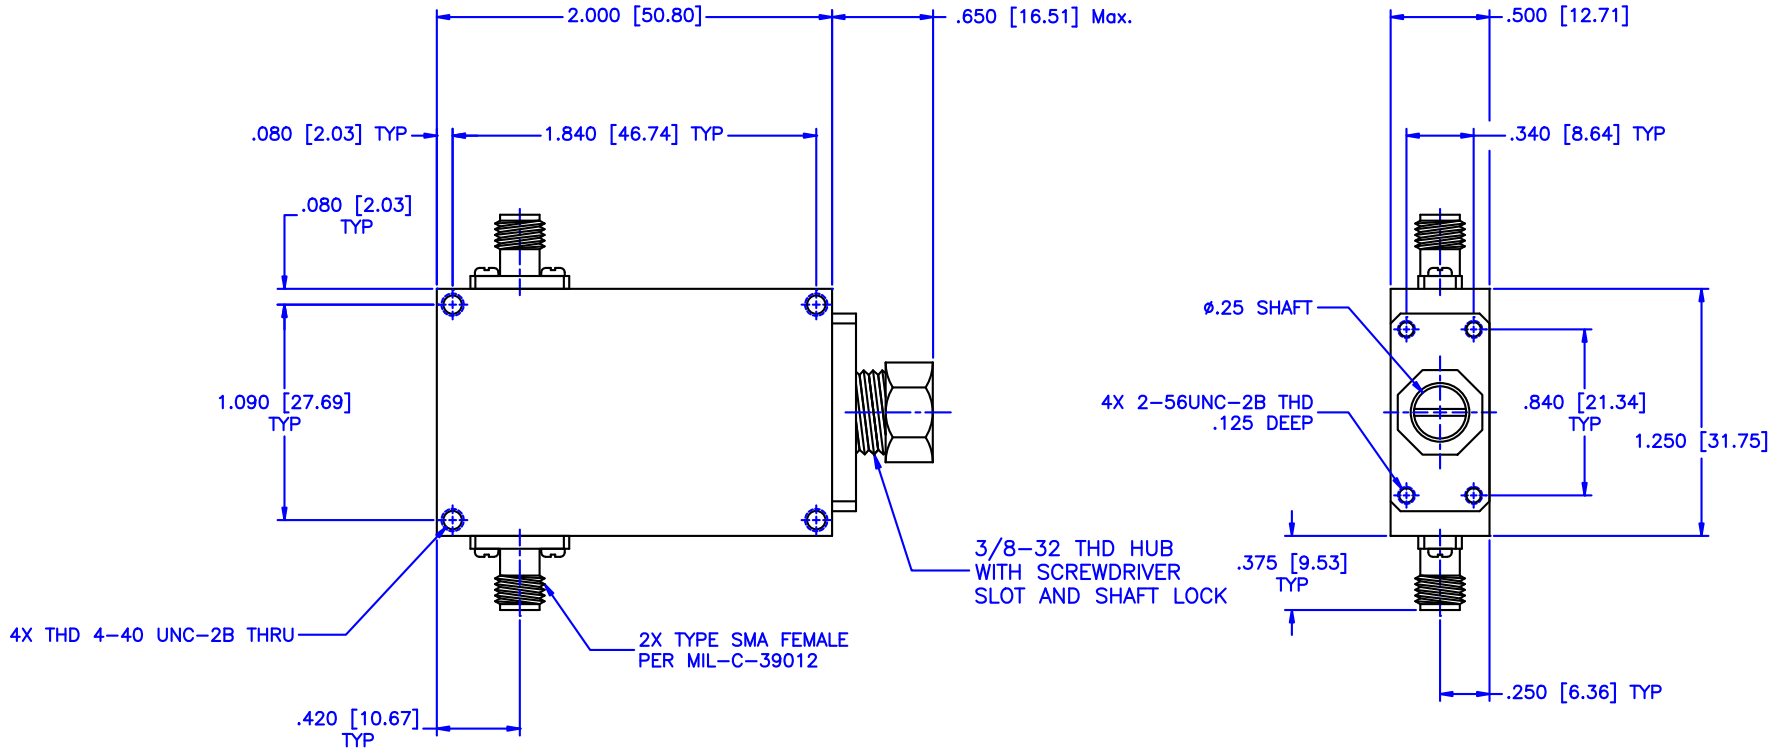

**Specifications**

Frequency Range: 3.6-4.3 GHz  
 Attenuation: 20dB  
 Insertion Loss: 0.5 Max.  
 VSWR: 1.50:1  
 Attenuation Vs Frequency: ±.50dB  
 RF Power: 5W Average, 3kW Peak

**Environmental**

Operating Temperature: -55°C to +110°C  
 Shock: 15 G's, 11mS, 1/2 sine  
 Vibration: 3 G's overall  
 Altitude: 25,000ft Operating  
 40,000 ft. Survival

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR		
DRAWN: Paiboon Luekhamhan		PART NO. CA2-20		
DATE: 02-09-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 02-09-2011		SIZE: A REV: N/A DWG NO. 80636
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		