


- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-2GHz
- 1.2 VOLTAGE RATING: 500V RMS (see level)
- 1.3 NOMINAL IMPEDANCE: 75 OHMS
- 1.4 DWV: 1500 V RMS @ 60 Hz (see level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: TEFLON, ASTM-D-1710
- 2.2 CENTER CONTACT: BRASS, ASTM-B-16

- 2.3 LOCKING RING: PHOSPHOR BRONZE, ASTM-B-159, ALLOY 510
- 2.5 ALL OTHER METAL PARTS: BRASS, ASTM-B-16
- 2.6 GASKET: SILICON RUBBER, ZZ-R 765, GR. 50 (RED)
- 3.0 FINISHES
- 3.1 CONTACT: SEE TABLE
- 3.2 ALL OTHER METAL PARTS: SEE TABLE

| | | |
|----------------------|---------|---------|
| DWG NO. 0L-0910-29-1 | | REV. A |
| PLATING VARIATIONS | | |
| PART NUMBER | BODY | CONTACT |
| 0910-29 | NICKEL | SILVER |
| 0910-29 | NI/GOLD | NICKEL |
| | | GOLD |

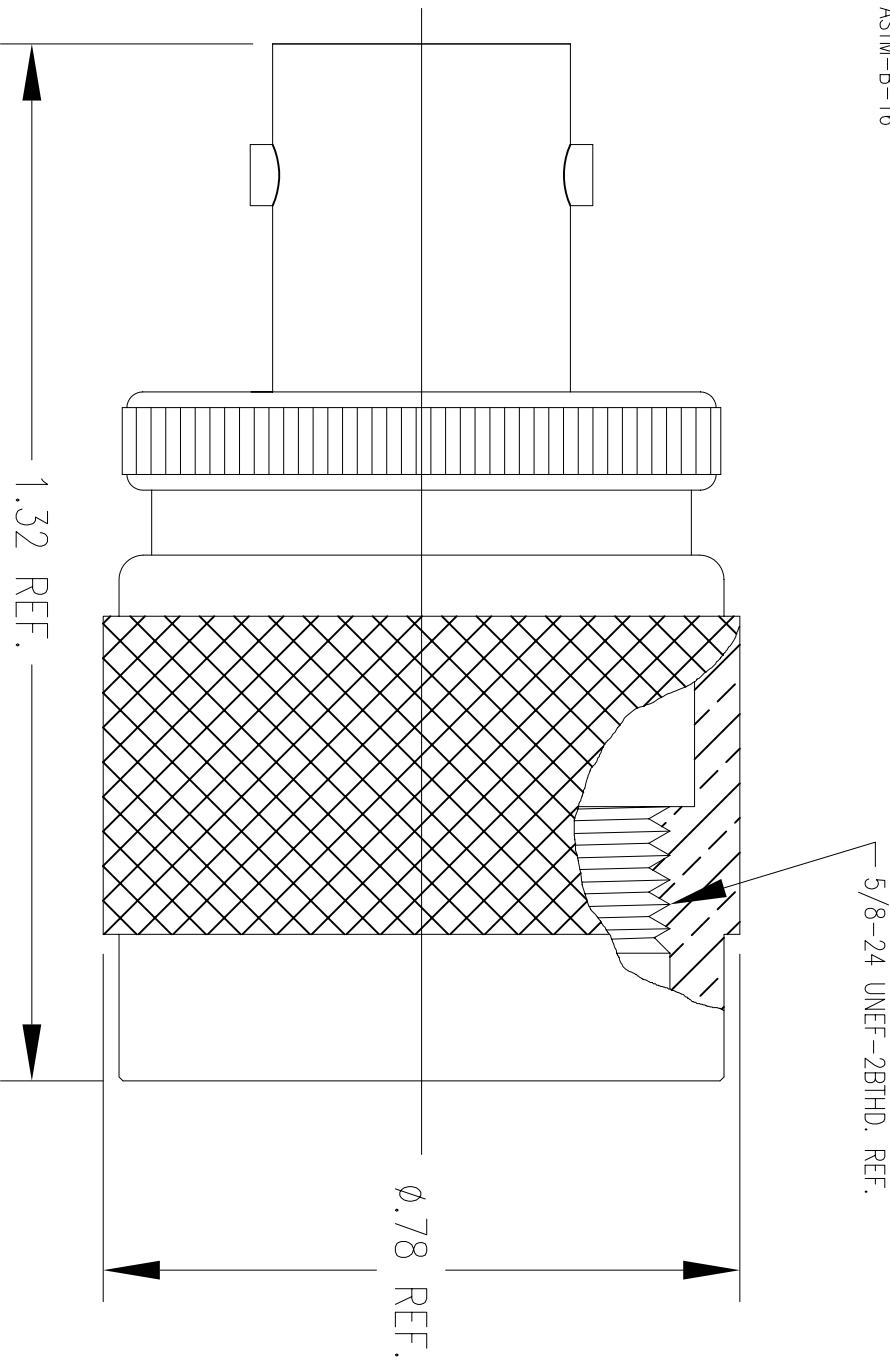

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.

.XXX = ±.005 ALL MACHINED SURFACES 63/ MAX.
.XX = ±.01 ANG. ±1/2° FRACTIONAL = 1/64

① .004 MAX. TIR

THIRD ANGLE PROJECTION

| Rev. | Revisions | Ref.: | Disp. | Date | Dwn. | Appd. |
|------|-----------|-------|-------|----------|------|-------|
| A | ORIGINAL | | NEW | 12/02/03 | | |

| CHKD | SJS | FSH | DWN | RD | APPR | DATE |
|------|-----|-----|-----|----|------|----------|
| | | | | | | 12/02/03 |

SAN-TRON, INC.
 4 NEWBURYPORT TPK. IPSWICH MA USA 01938
 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573
 WWW: santron.com E MAIL: santron@santron.com

TITLE
 ADAPTER, STR. 75 OHM BNC(F)
 TO 75 OHM N(M)

MATERIAL: SEE NOTE 2.0
 FINISH: SEE TABLE

CAGE CODE: 50896
 DWG NO. 0L-0910-29-1
 SCALE 4:1
 REV. A