

OUTPUT

Frequency
10.0 GHz

Level
+16 dBm ±2 dB into 50 ohms

STABILITY**Aging (free-running)**

1 x 10⁻⁶ first year
after 30 days operating, typical
5 x 10⁻⁷ second year, typical
3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), typical

100 Hz -94 dBc/Hz
1 kHz -119 dBc/Hz
10 kHz -138 dBc/Hz
100 kHz -142 dBc/Hz
1 MHz -147 dBc/Hz
10 MHz -149 dBc/Hz

Temperature Stability

±5 x 10⁻⁷, 0 to +50°C (Ref. +25°C)

Harmonics

-25 dBc

Sub-Harmonics

-60 dBc

Spurious

-80 dBc, excluding power supply line related spurs

MECHANICAL**Dimensions**

5.16 x 4 x 1"

Connectors

SMA(f)'s and solder pins on side

Packaging

Nickel-plated machined aluminum housing – G3

Mounting

Threaded inserts on base, #2-56, 6 places, 0.190" deep

POWER REQUIREMENTS**Warm-Up Power**

≤ 17 Watts for 5 minutes

Total Power

≤ 13.5 Watts at +25°C

Supply Voltage

+15 VDC ±5%

ADJUSTMENT**Mechanical Tuning**

±4 x 10⁻⁶

Electrical Tuning

±5 x 10⁻⁷, ±5 VDC

Negative slope

CRYSTAL**Type**

100 MHz SC-cut (x100 w/SAW)

OTHER**Label**


Use conventional label with the following information:
501-27179 (Current Rev.)
10 GHz GMXO-FR
+15 VDC
Serial # - Date Code
(Mark connectors with function)

Test Data

Output Level
Phase Noise
Temperature Stability
Harmonics, Subs, Spurious
Power – Warm-up and Total
Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	09-16-13	Initial Release	Liz	
A	02-06-14	Output Level to +16 dBm	PAC	

G3 Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output

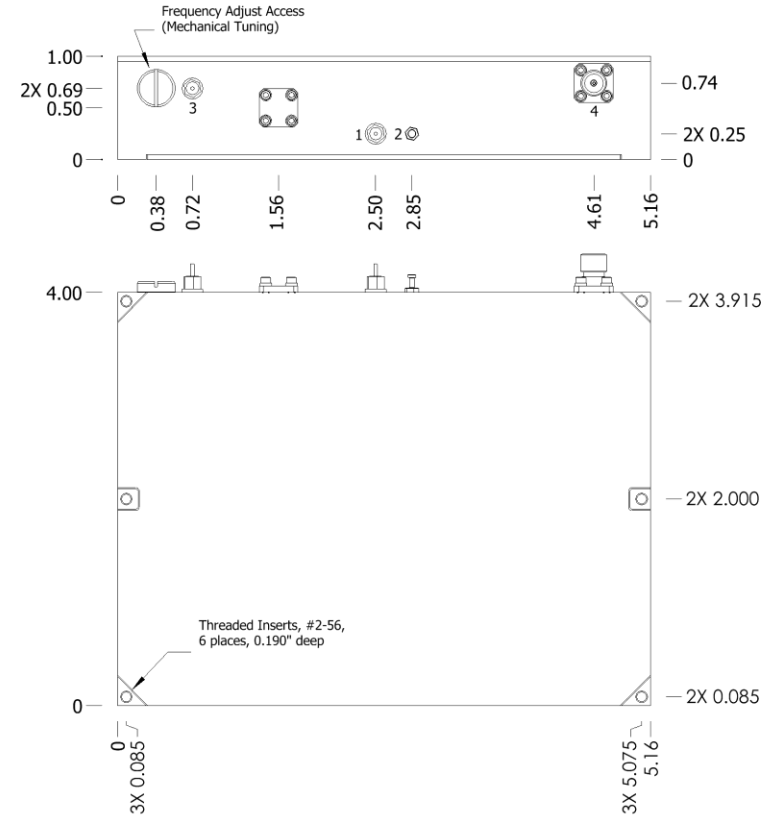

Wenzel Associates, Inc.
Austin, Texas

Title:
**10.0 GHz Golden Multiplied Crystal Oscillator
(GMXO-FR with SAW)**

P/N: 501-27179	Rev: A	Date: 02-06-14	Drawn:	Ref:
--------------------------	------------------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FCSCM: 62821	Page 1 of 1
--	-----------------------------	------------------------------	------------------------	---------------------------