

Model 1433 High Power, N Connectors Convection Cooled

dc to 6.0 GHz
250 Watts

RoHS



INTERMODULATION (Model 1433-X-LIM Only): IM3 (Reflected) = -100 dBc with two input signals @ 869 MHz and 891 MHz with an average power of +43 dBm each.

POWER RATING: 250 watts average (mounted horizontally assuming unobstructed air flow and natural convection around unit) @ 25°C ambient temperature, derated linearly to 25 watts @ 125°C. 10 kilowatts peak (5 µsec pulse width; 1.25% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: Swept data plots of SWR from 50 MHz to 6 GHz is available at additional cost-----.


CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female connector (-3).

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper female contact or stainless steel male contact.

WEIGHT: Net 1,530 g (3 lbs., 6 oz.) maximum

MODEL NUMBER DESCRIPTION:

Example:

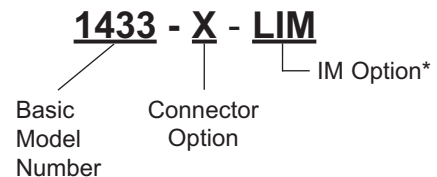

Features

- /// **Compact Construction** - Lowest size/power ratio.
- /// **Low SWR** - Maximum SWR remains low through full frequency and power range.
- /// **Rugged Construction** - Quality connector with special high temperature support beads.

Specifications


NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 6.0 GHz

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 2	1.10
2 - 6	1.15

PHYSICAL DIMENSIONS:

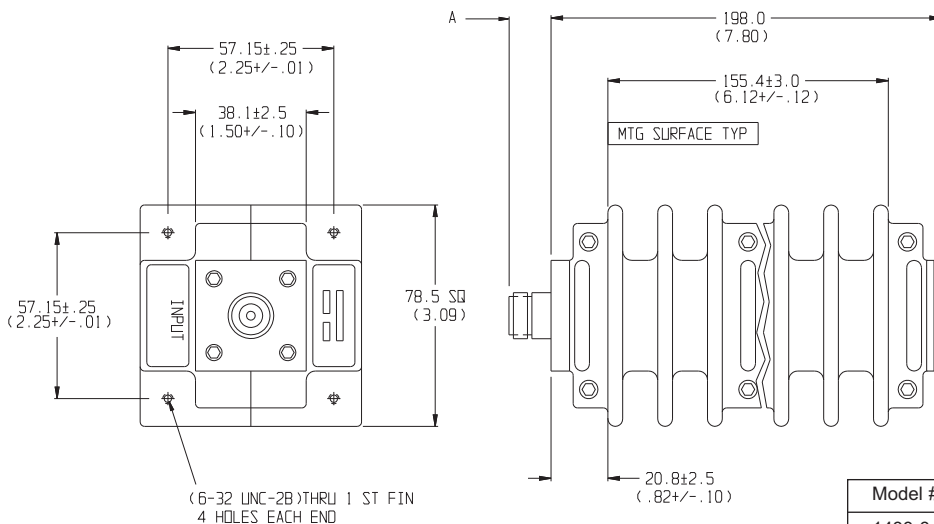

* Add -LIM to entire model number for Low Intermodulation option.

Model #	DIM A	Connector Type
1433-3	15.0 (0.59)	N female
1433-4	22.9 (0.90)	N male

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.