

# Adapters, Between-Series

## Quick Connect SMA to Type N, DC - 18 GHz

### SPECIFICATIONS:

Model: 5057Q

**RoHS**  
Compliant

#### Electrical:

Frequency Range \_\_\_\_\_ DC - 18.0 GHz  
VSWR:  
DC To 12.4 GHz \_\_\_\_\_ 1.25:1 Maximum  
12.4 To 18 GHz \_\_\_\_\_ 1.30:1 Maximum  
Impedance \_\_\_\_\_ 50 Ohms  
Operating Temp Range \_\_\_\_\_ -65°C to +85°C  
\* Typical PIM \_\_\_\_\_ <-155 dBc


#### Mechanical:

Connectors \_\_\_\_\_ White Bronze Plated Brass  
Mates with MILSTD-348  
Conductors \_\_\_\_\_ Gold Plated Beryllium Copper  
Coupling Nuts \_\_\_\_\_ White Bronze Plated Brass

\* Swept Data over 1930 - 1990 MHz, 2x20 W Tones

Model Number: 5057Q

SMA Male to Type N Female

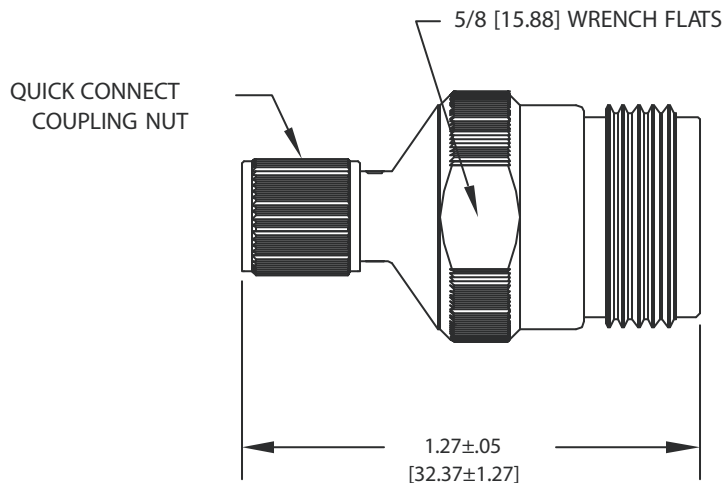

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5057Q: REV A



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex.com/inmet • inmet-sales@aeroflex.com



# 5057Q Adapter

