

Surface Mount

# Voltage Controlled Oscillator

ROS-3233+

5V Tuning for PLL IC's 3008 to 3233 MHz

## Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- aqueous washable

## Applications

- wireless communications
- WiMAX 3.5GHz



CASE STYLE: CK605  
PRICE: \$19.95 ea. QTY (5-49)

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



## Electrical Specifications

MODEL NO.	FREQ. (MHz)	POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz	TUNING				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)	PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc Current (volts) (mA)
				VOLTAGE RANGE	SENSITIVITY	PORT CAP	3 dB MODULATION BANDWIDTH (MHz)					
	Min. Max.	Typ.	1 10 100 1000	Min. Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.
ROS-3233+	3008 3233	+3	-69 -96 -118 -138	0.5 4.5	70-85	13	350	-90	-33 -22	1	1.5	5 40

## Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

## Outline Drawing

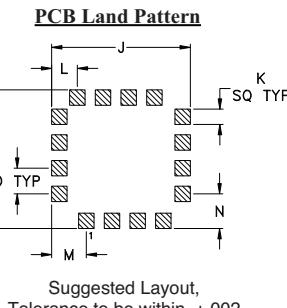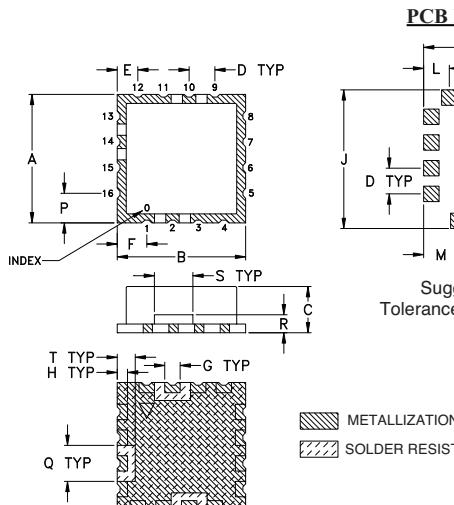


## Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7.0V
Absolute Max. Tuning Voltage (Vtune)	6.5V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

## Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

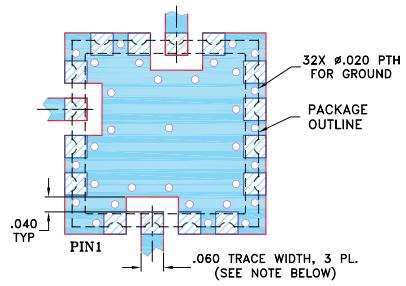

### NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS  $.030'' \pm .002''$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070 grams

12.70 12.70 4.57 2.54 2.03 2.92 1.52 1.02 13.72 1.52 2.54 3.43 3.43 2.92 3.56 1.78 3.81 1.78 1.0



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

ISO 9001 ISO 14001 AS 9100 CERTIFIED

I/F/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. A  
M140869  
EDR-10651MP  
ROS-3233+  
RAV  
130311  
Page 1 of 2

## Performance Data & Curves\*

**ROS-3233+**

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (kHz)	PHASE NOISE at 3121 MHz (dBc/Hz)	
		-55°C +25°C +85°C			-55°C +25°C +85°C				F2	F3	F4			1kHz	10kHz	100kHz	1MHz			
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C													
0.00	124.28	2922.1	2903.1	2884.0	2.46	2.70	2.10	32.06	-41.0	-36.2	-40.4	0.93	1.01	-70.53	-98.2	-120.3	-138.8	1.0	-68.78	
0.25	106.42	2951.2	2934.2	2916.9	2.49	2.63	2.11	32.08	-41.1	-35.3	-41.6	0.06	1.80	-70.57	-97.9	-119.9	-138.4	2.0	-77.43	
0.50	97.44	2977.0	2960.8	2945.0	2.58	2.75	2.07	32.11	-40.1	-35.0	-40.7	0.35	1.30	-72.01	-98.3	-120.6	-139.0	3.5	-83.62	
0.75	90.67	3000.8	2985.1	2969.7	2.51	2.81	2.22	32.12	-42.0	-34.6	-43.9	0.61	1.52	-70.33	-97.9	-120.5	-138.5	6.0	-89.81	
1.00	85.00	3022.7	3007.8	2992.9	2.63	2.78	2.23	32.15	-40.3	-33.6	-46.1	0.76	1.66	-70.53	-97.9	-120.7	-138.7	8.5	-94.01	
1.25	81.81	3043.6	3029.1	3014.5	2.69	2.87	2.28	32.17	-39.7	-33.3	-47.8	0.92	1.43	-70.85	-97.8	-120.4	-138.5	10.0	-95.65	
1.50	79.62	3063.9	3049.5	3035.1	2.59	2.90	2.36	32.19	-40.2	-32.5	-47.0	1.00	1.08	-71.14	-96.9	-119.6	-137.7	20.8	-103.40	
1.75	75.37	3083.2	3069.4	3055.1	2.65	2.81	2.39	32.22	-40.4	-31.7	-45.1	1.11	1.37	-69.66	-97.1	-119.8	-138.2	35.5	-108.61	
2.00	75.47	3102.3	3088.3	3074.6	2.70	2.88	2.35	32.25	-39.3	-31.2	-44.5	1.19	1.74	-69.77	-97.7	-119.7	-138.0	60.7	-113.65	
2.25	74.53	3121.1	3107.1	3093.1	2.67	2.92	2.46	32.28	-40.3	-31.1	-42.7	1.27	1.08	-70.50	-97.0	-119.5	-137.5	86.7	-116.59	
2.50	73.86	3139.7	3125.8	3111.8	2.61	2.90	2.52	32.31	-39.6	-30.3	-42.4	1.38	1.28	-69.41	-97.0	-119.7	-137.9	100.0	-117.75	
2.75	72.53	3158.0	3144.2	3130.3	2.66	2.85	2.54	32.35	-38.7	-30.4	-41.4	1.41	1.54	-69.45	-96.5	-119.3	-137.7	148.1	-121.61	
3.00	74.34	3176.7	3162.3	3148.7	2.69	2.92	2.52	32.38	-39.4	-31.5	-41.3	1.49	1.47	-68.52	-96.1	-118.9	-137.2	211.6	-124.82	
3.25	75.07	3195.6	3180.9	3166.5	2.70	2.96	2.64	32.40	-38.2	-32.4	-40.7	1.56	1.19	-69.88	-96.4	-119.0	-137.4	302.4	-127.78	
3.50	74.17	3214.3	3199.7	3184.8	2.70	2.94	2.68	32.42	-37.7	-34.7	-39.9	1.66	1.30	-68.33	-96.0	-118.9	-137.2	361.5	-129.22	
3.75	72.35	3232.7	3218.2	3203.3	2.76	2.92	2.66	32.47	-38.5	-35.1	-41.0	1.70	1.10	-67.98	-95.8	-118.6	-137.1	507.5	-132.16	
4.00	72.90	3251.1	3236.3	3221.6	2.80	2.97	2.62	32.51	-37.8	-35.2	-41.6	1.75	1.28	-67.52	-95.8	-118.8	-137.0	606.7	-133.72	
4.25	72.42	3269.3	3254.6	3239.4	2.80	3.00	2.68	32.53	-38.3	-34.9	-41.6	1.85	1.33	-68.64	-95.9	-118.6	-137.0	851.6	-136.76	
4.50	71.10	3287.4	3272.7	3257.3	2.77	3.00	2.71	32.56	-37.5	-35.2	-43.4	1.88	0.99	-67.74	-95.6	-118.3	-136.5	1000.0	-138.25	

\*at 25°C unless mentioned otherwise

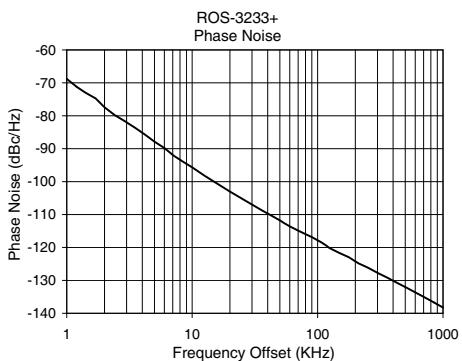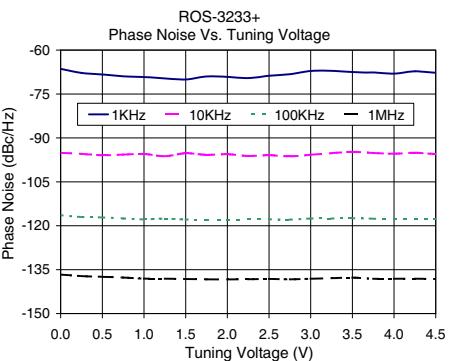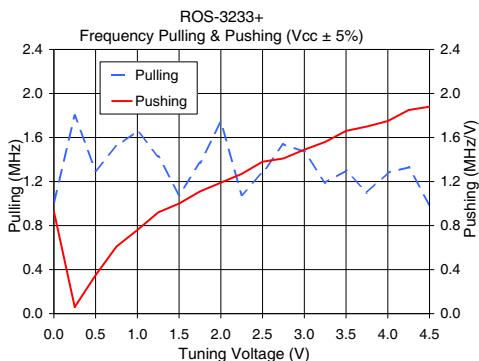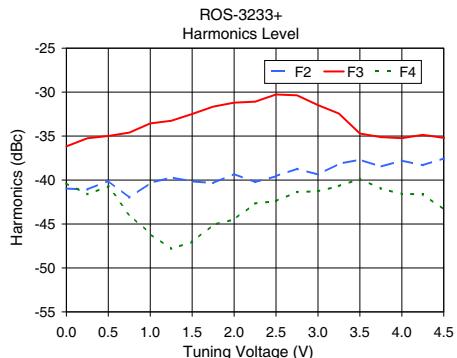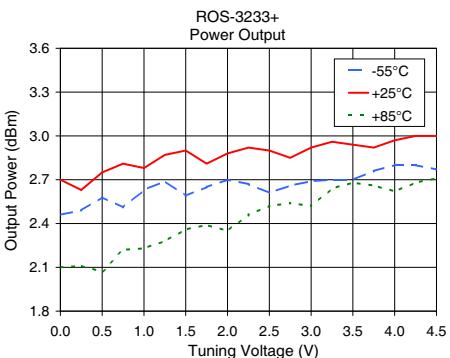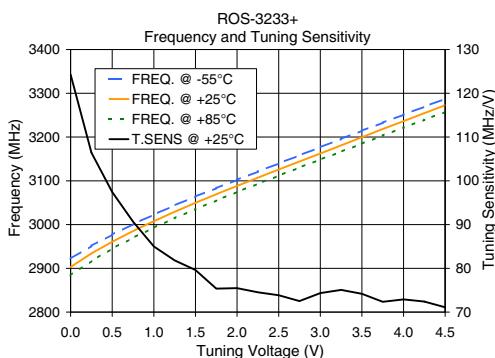

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

For detailed performance specs & shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).