


Features

- LO Power +7 dBm
- Up to +1 dBm RF
- Surface Mount
- Low Profile
- RoHS* Compliant, 260°C reflow compatible
- Tape and reel packaging available

Description

M/A-COM's MAMXES0115 is a RoHS compliant, Low Cost, Broadband, high performance Double Balanced Mixer designed for use in high volume wireless applications. The device has been optimised by careful selection of the Schottky Diode and Balun Transformer for excellent performance. The MAMXES0115 mixer is offered in an SM-89 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.

Outline Drawing — SM-89

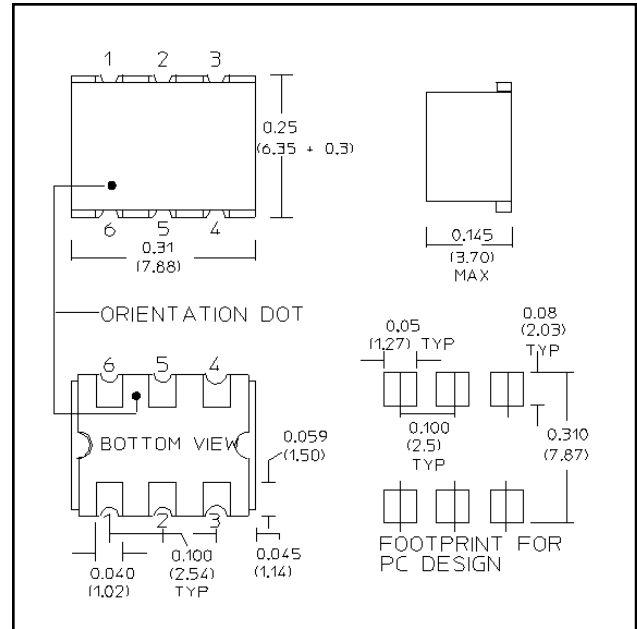

Electrical Specifications: @ +25°C, Z₀ = 50 Ohms, LO = +7dBm

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	1 - 1000	MHz	—	—	—
LO Frequency	—	1 - 1000	MHz	—	—	—
IF Frequency	—	DC - 1000	MHz	—	—	—
Conversion Loss	—	1 - 500MHz	dB	—	6.5	7.5
		500 - 1000 MHz	dB	—	7.0	8.5
Isolation (LO - RF)	—	1 - 5 MHz	dB	50	55	—
		5 - 500 MHz	dB	25	35	—
		500 - 1000 MHz	dB	18	25	—
Isolation (LO - IF)	—	1 - 5 MHz	dB	50	55	—
		5 - 500 MHz	dB	25	30	—
		500 - 1000 MHz	dB	15	20	—
RF Input for 1 dB Compression	—	—	dBm	—	—	+1
Input IP3	—	5 - 1000 MHz	dBm	14	18	-

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Pin Configuration





Pin No.	Function
1	LO
2	Ground
3	Ground
4	RF
5	IF
6	Ground

Absolute Maximum Ratings ¹

Parameter	Absolute Maximum
Max RF Power	50 mW
Peak IF Current	40 mA
Pin Temperature (10 seconds)	260° C
Operating Temperature	-55°C to +100°C
Storage Temperature	-65°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Typical Performance Curves: @ 25°C, Z₀ = 50Ω, LO = +7dBm

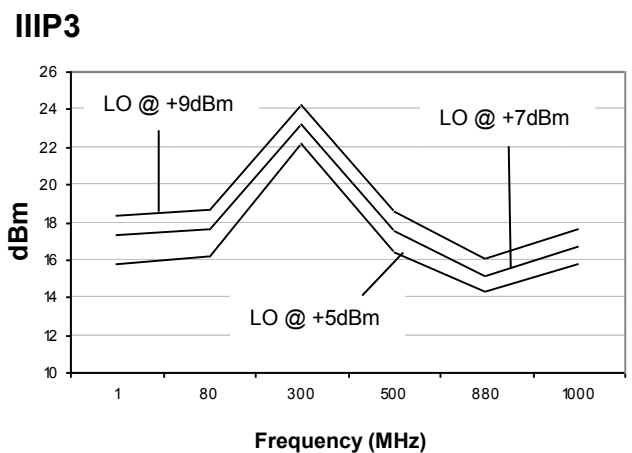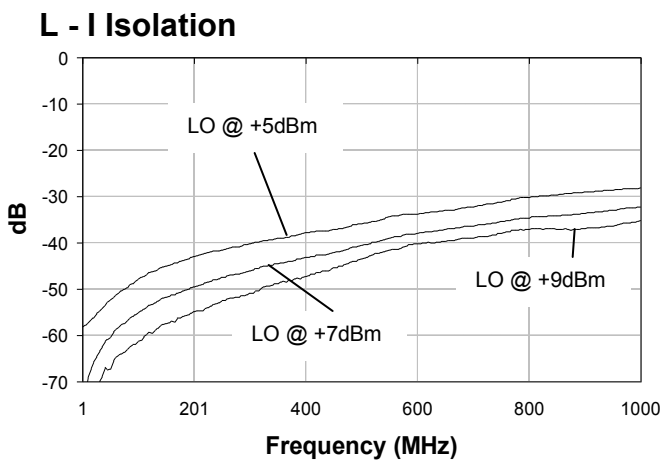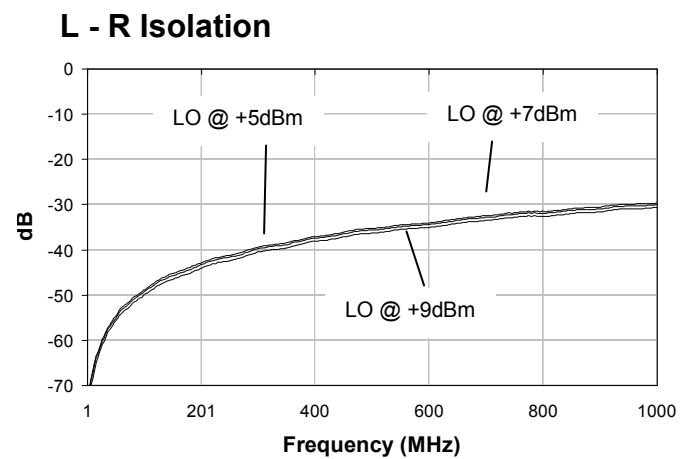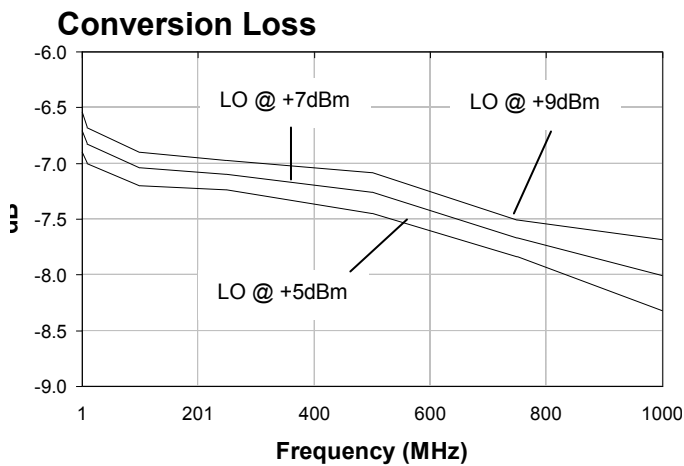


2


MA-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

Typical Performance Curves over Temperature: @ -55°C, +25°C, +100°C


Conversion Loss

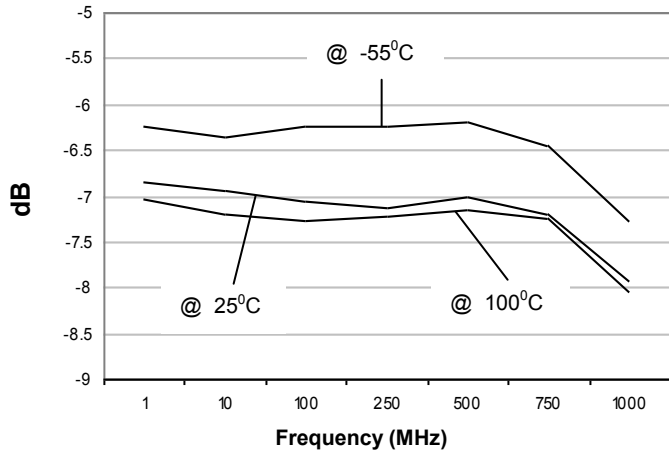


L - R Isolation

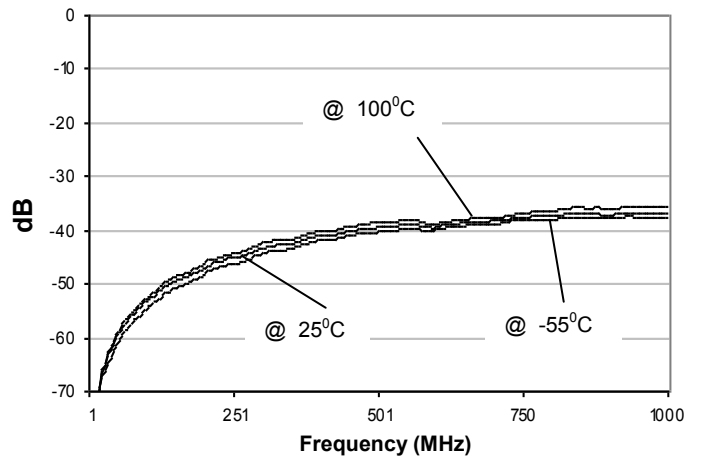

L - I Isolation

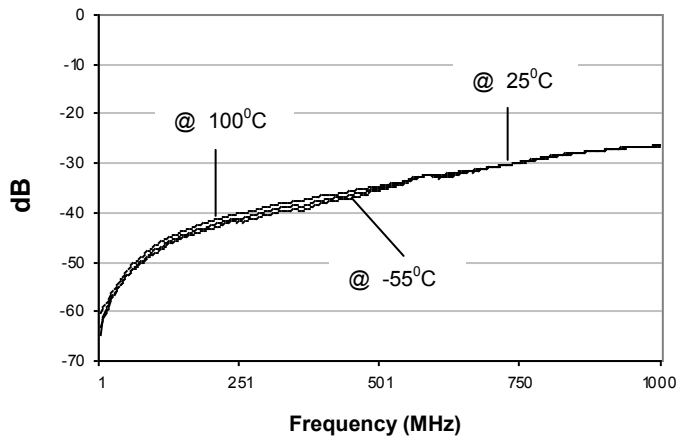

IIP3

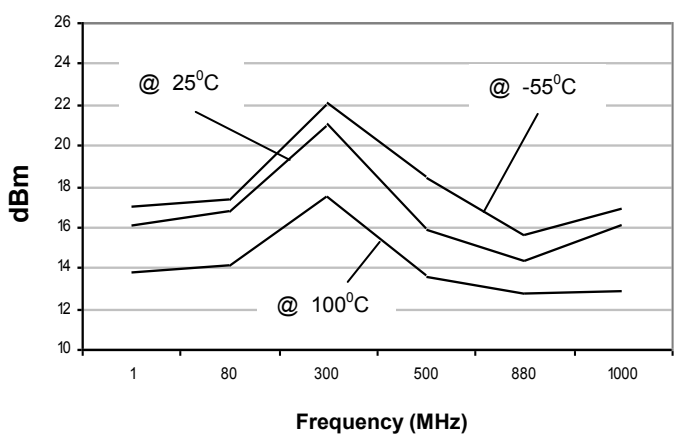

MAMXES0115



E-Series Surface Mount Mixer 1 – 1000 MHz

Rev. V6

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	12.00
Ao	mm	7.01
Bo	mm	8.61
Ko	mm	5.23
Orientation	-	F2
Reference Application Note ANI-019 for orientation		

Ordering Information

Part Number	Description
MAMXES0115	Tape and Reel (900 pieces/ Reel)

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.