

DWG. NO.


REV

SHT



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.



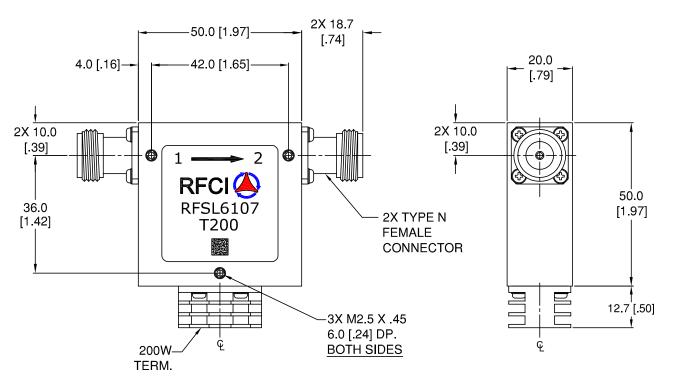

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 600 | | 800 |
| Insertion Loss (dB) | | < .50 | .60 |
| Isolation (dB) | 17 | > 19 | |
| Return Loss (dB) | 17 | > 19 | |

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum |
|---------------------------------|----------------|
| Forward PWR Peak/AVG | 2.5K/250 Watts |
| Reverse Power CW | 200 Watts |
| Termination Rating (See note 2) | 200 Watts |
| Operating Temperature | -20 to +85° C |
| Storage Temperature | -40 to +95° C |

Nf 200W ISOLATOR MODEL: RFSL6107-T200

