


PSM-2B & PSM-2C SERIES – PHASE SHIFTERS, MANUAL

TECHNICAL FEATURE

FEATURES

- 10 to 1000 MHz
- 0° to 90° Range
- 10% Bandwidth
- Multi-Turn Adjustment, High Resolution Units

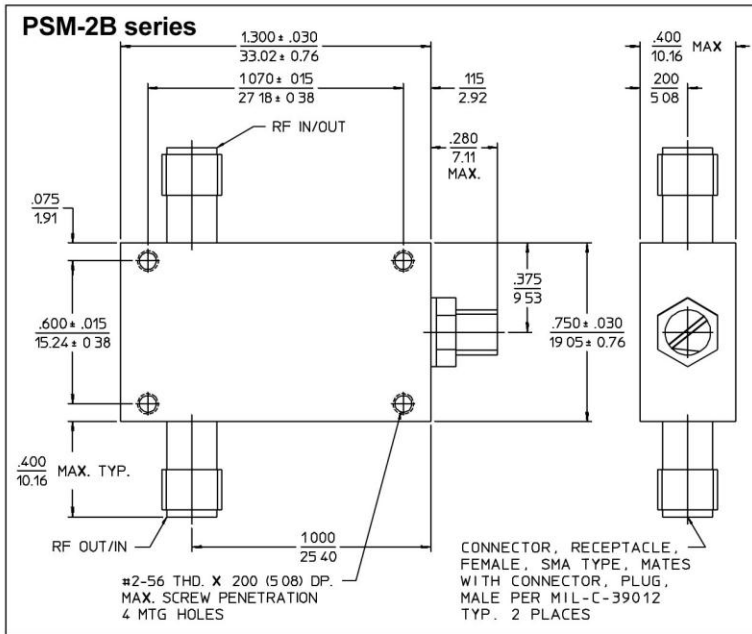


PRINCIPAL SPECIFICATIONS

Tapped Version	Flange Version	Center Frequency, f_0 , MHz
PSM-2B-***B	PSM-2C-***B	10 to 500
PSM-2B-***B	PSM-2C-***B	500 to 1000

For complete Model Number replace *** with desired Center Frequency, f_0 in MHz.

GENERAL SPECIFICATIONS

Phase Shift Range:	90° min. @ f_0
Usable Bandwidth:	$f_0 \pm 5\%$
Insertion Loss:	1.5 dB max.
Impedance:	50 Ω nom.
VSWR: < 500 MHz:	1.6:1 max.
> 500 MHz:	1.8:1 max.
Screw Drive:	Multi-Turn
Turns for maximum phase shift:	
CW Power:	0.5 Watts max.
Connectors:	SMA Female
Weight, nominal:	2 oz (58 g)
Operating Temp:	-55° to +85°C

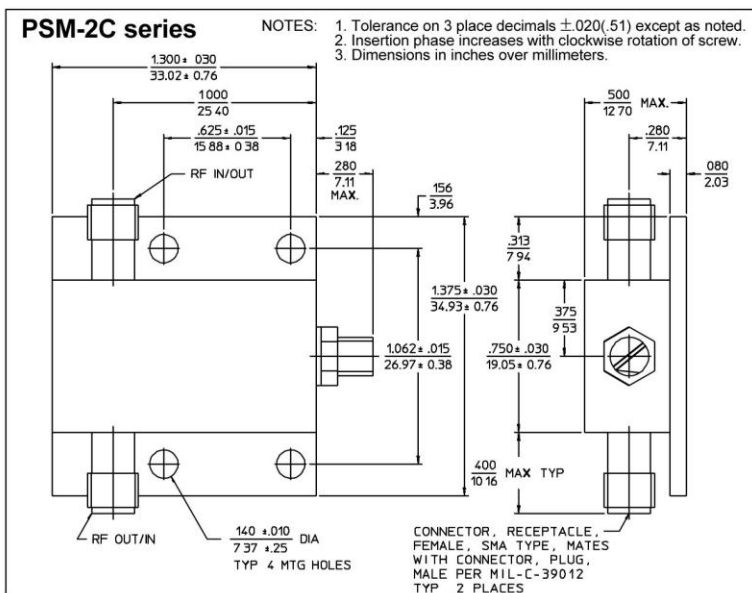

General Notes:

1. The PSM-2B and PSM-2C series provide continuously variable phase adjustment using a precision multi-turn screw from 0° to 90°. The packages are compact and sturdy.
2. These phase shifters employ lumped element quadrature hybrids with capacitor tuned LC networks acting as sliding short circuits on the outputs. The electrical length of the short effectively delays the reflected signal which appears at the isolated port of the quadrature hybrid.
3. Similar phase shifters are available in a variety of connectorized packages, as well as electronically tuned models in flatpacs, surface mount packages and Meri-Pacs.

15Feb96

Crane Aerospace & Electronics

Microwave Solutions – Merrimac Industries
41 Fairfield Place, West Caldwell, NJ 07006
+ 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw

PSM2B2C.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors.

We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.

