





Standards
NF C 96-315
MIL-DTL-39030

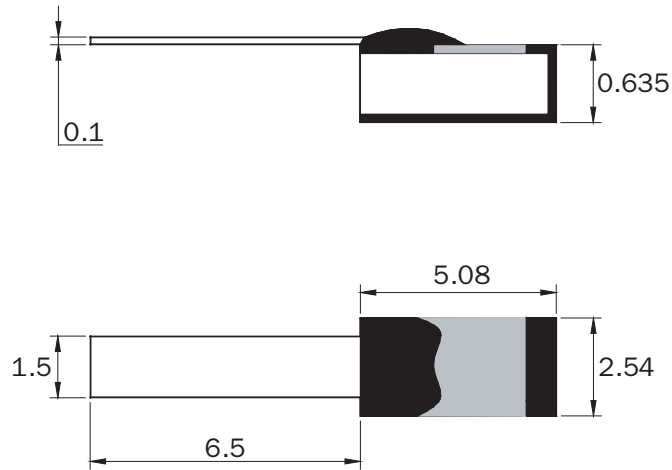

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Tab	Ag
Tab attachment	Brazed with epoxy encapsulation

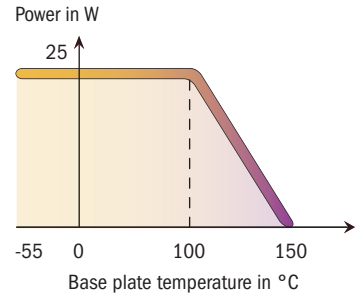

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
17-0487	4	25	50	1.20

mm	inch
0.1	0.004
0.635	0.025
1.5	0.059
2.54	0.100
5.08	0.200
6.5	0.256