



50 Ohm N Female To 75 Ohm F Male Matching Pad  
 Operating From DC to 3 GHz RoHS Compliant

TECHNICAL DATA SHEET

PE7073

50 Ohm N Female To 75 Ohm F Male Matching Pad Operating From DC to 3 GHz RoHS Compliant

**Configuration**

Design	Fixed Matching Pad
Body Style	Straight
Connector 1	N Female
Impedance 1	50 Ohms
Connector Specification 1	MIL-STD-348
Connector 2	F Male
Impedance 2	75 Ohms

**Electrical Specifications**

Frequency Range, GHz	DC to 3
Maximum VSWR	1.25:1
Maximum Attenuation, dB	5.7
Attenuation Accuracy	± 0.5
Maximum Input Power, Watts	2
Peak Power, Watts	250
Peak Power Duty Cycle, µs	5
Directionality	Bidirectional

**Mechanical Specifications**

**Size**

Length, in [mm]	1.75 [44.45]
Width/Dia., in [mm]	0.63 [16]
Body Material and Plating	Passivated Stainless Steel

**Connector 1**

Type	N Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel

**Connector 2**

Type	F Male
Inner Conductor Material and Plating	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, in.	7/16
Torque, in-lbs [Nm]	15 [1.7]
Body Material and Plating	Brass, Nickel

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm N Female To 75 Ohm F Male Matching Pad Operating From DC to 3 GHz RoHS Compliant PE7073](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





50 Ohm N Female To 75 Ohm F Male Matching Pad  
Operating From DC to 3 GHz RoHS Compliant

TECHNICAL DATA SHEET

PE7073

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

75 Ohm Type N Connectors Mate Only With Other 75 Ohm Connectors. Mating With 50 Ohm Connectors May Damage Center Conductors.

50 Ohm N Female To 75 Ohm F Male Matching Pad Operating From DC to 3 GHz RoHS Compliant from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm N Female To 75 Ohm F Male Matching Pad Operating From DC to 3 GHz RoHS Compliant PE7073](http://www.pasternack.com/50-ohm-n-female-75-ohm-f-male-matching-pad-pe7073-p.aspx)

URL: <http://www.pasternack.com/50-ohm-n-female-75-ohm-f-male-matching-pad-pe7073-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE7073 CAD Drawing

50 Ohm N Female To 75 Ohm F Male Matching Pad  
Operating From DC to 3 GHz RoHS Compliant

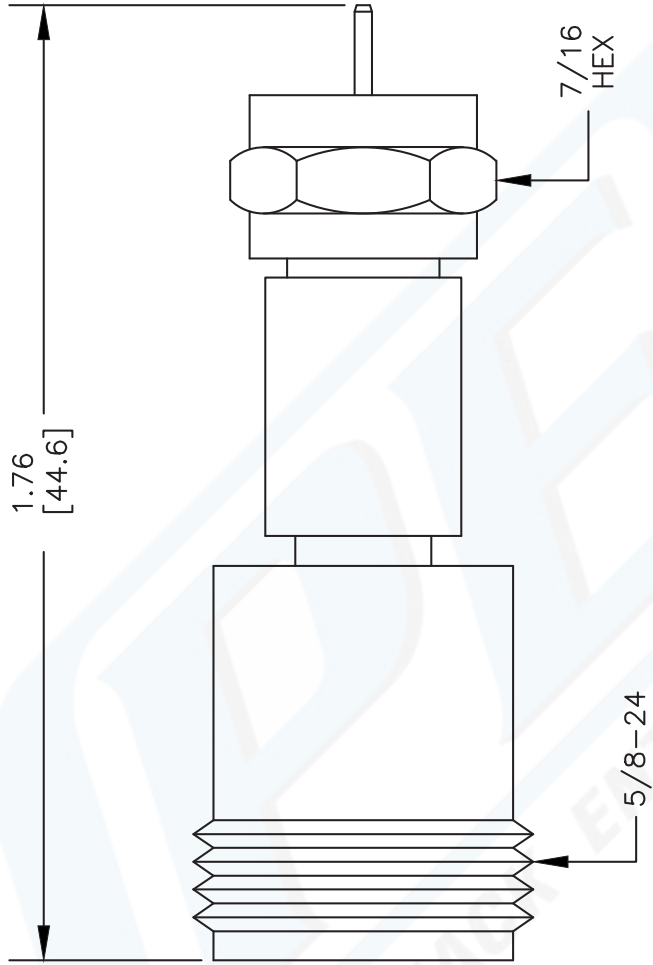

DWG TITLE

**PE7073**

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

REV. A

FSCM NO. 53919

CAD FILE 020712

SCALE N/A

SIZE A

2233



**PASTERNAK®**

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)