






Standards
NF C 96-315
MIL-DTL-39030

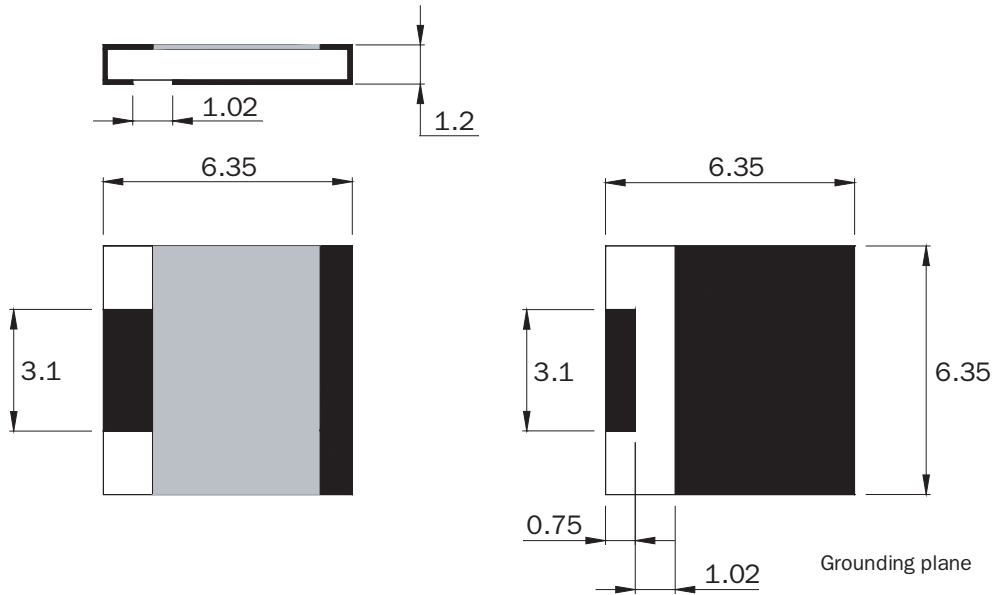

Substrate	Al ₂ O ₃
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Sn

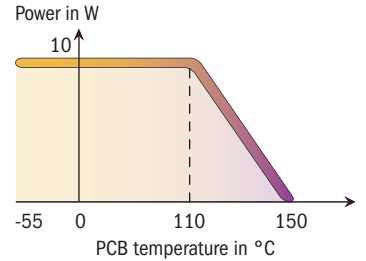

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance (Ω ± 5%)	Max VSWR
40-0232	2.5	10	50	1.25

mm	inch
0.75	0.030
1.02	0.040
1.2	0.047
3.1	0.122
6.35	0.250

Available on Tap and Reel Packaging

