


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

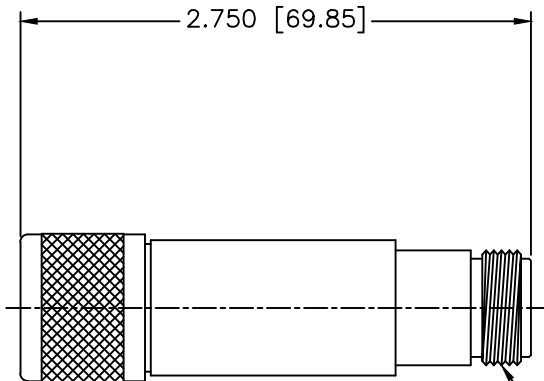

TYPE N MALE

TYPE N FEMALE

SPECIFICATIONS

Frequency Range: DC-4 GHz
 VSWR: 1.25:1 Max.
 Power: 10 Watts
 Attenuation Accuracy: 20±0.5dB
 Operating Temperature: -65°C to +125°C
 Impedance: 50 ohms

Mechanical

N Connectors: Passivated Stainless Steel
 Conductors: Gold Plated Beryllium Copper
 Housing: Aluminum

| | | | | |
|------------------------------|--|---|---------------------------------------|---|
| MATERIAL: | | MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM | SCALE: | N/A |
| | | | SHEET: | N/A |
| | | UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2° | DRAWING TITLE: 10 WATTS ATTENUATOR | |
| DRAWN: Paiboon Luekhamhan | | DATE: 05-23-2006 | PART NO. FAN-2-20 | |
| APPROVED: T. Nguyen | | DATE: 05-23-2006 | CAGE CODE: OD2L5 | SIZE: A REV: N/A DWG NO. 82560 |
| | | PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) | DO NOT SCALE THE DRAWING | |
| | | THIRD ANGLE PROJECTION | | |

