


DWG. NO.

REV





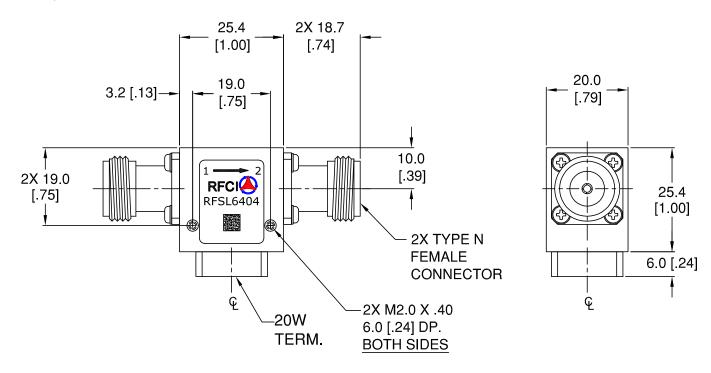

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1500		1800
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

Maximum	
2.0K/200 Watts	
20 Watts	
20 Watts	
-40 to +85° C	
-40 to +95° C	

Nf 20W ISOLATOR MODEL: RFSL6404

