


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

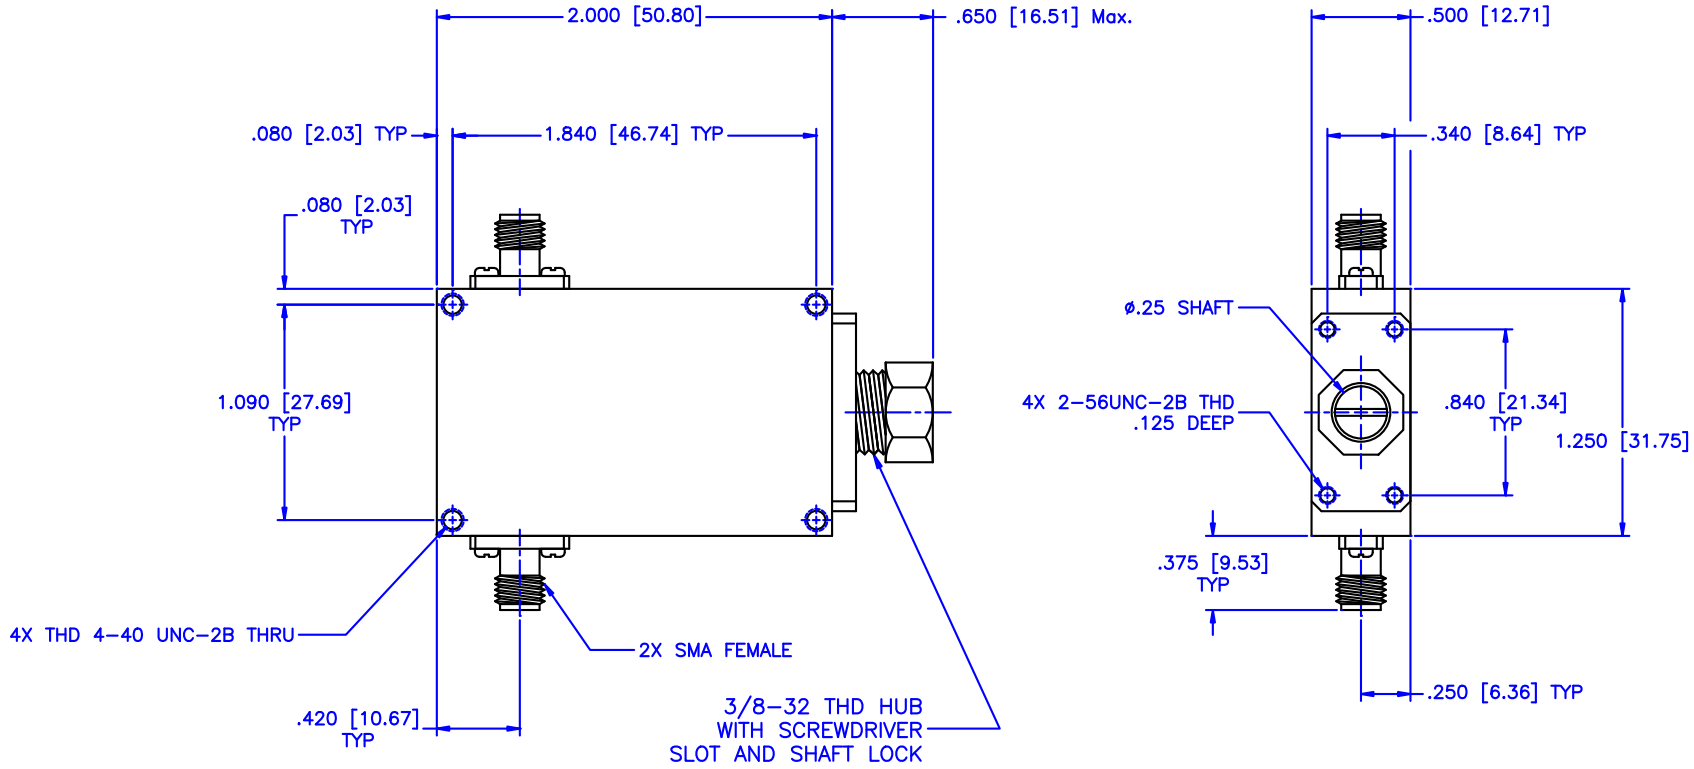

GENERAL SPECIFICATIONS

Frequency Range: 6-10 GHz
 Attenuation: 10dB
 Flatness: ±1.0dB
 VSWR: 1.50:1 Max.
 Insertion Loss: 0.5dB max.
 RF Power: 7W average, 3kW peak

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR		
DRAWN: Paiboon Luekhamhan		PART NO. CA27-10		
DATE: 05-16-2013		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: A REV: A		DWG NO. 85988
DATE: 05-16-2013		DO NOT SCALE THE DRAWING		
THIRD ANGLE PROJECTION				