

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 80–1000 MHz


Insertion Loss: 0.20dB Max.

Power: 200 Watts CW

VSWR: 1.15:1 Max.

Sensitivity: ±0.50dB

Directivity: 20dB Min.

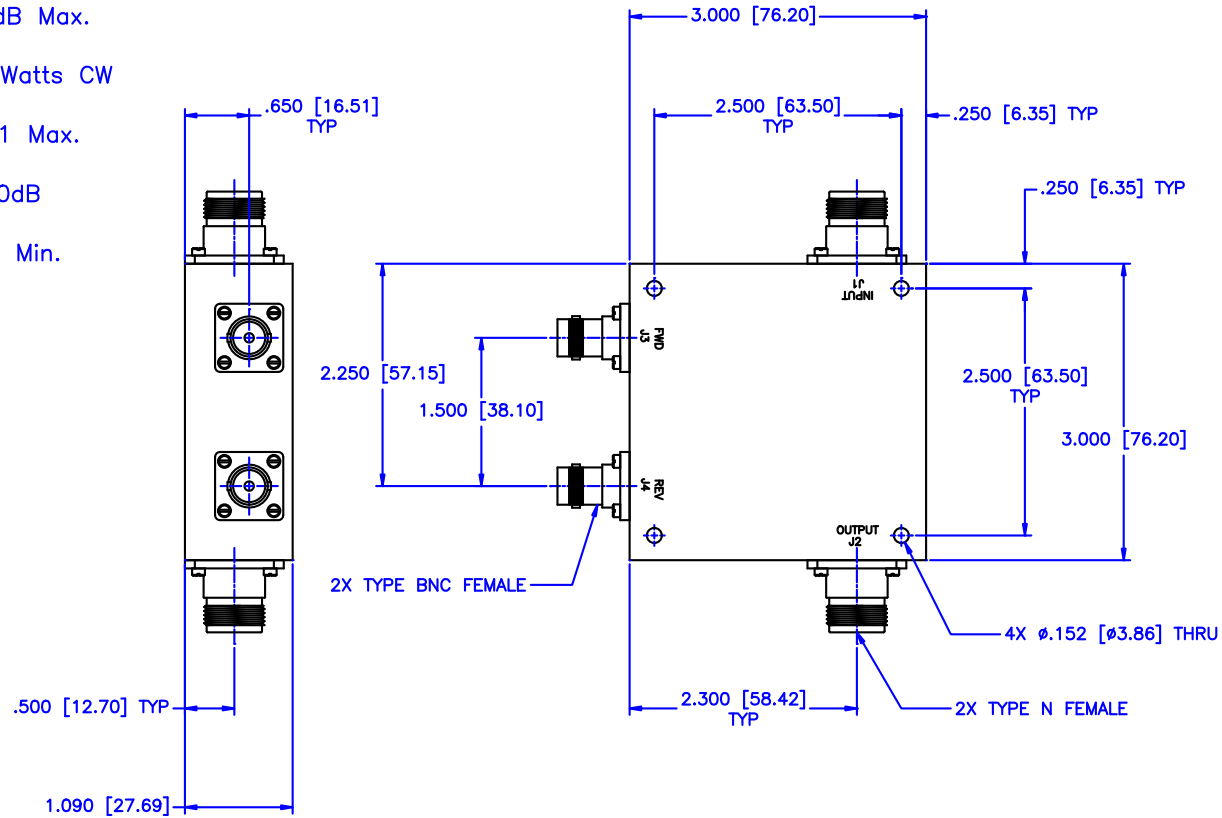

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7225 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER		
DRAWING:		PART NO. HDL-5-40		
DATE:	03-26-1990	CAGE CODE: OD2L5		
APPROVED:	T. Nguyen	SIZE:	N/A	REV: N/A
DATE:	03-26-1990	DO NOT SCALE THE DRAWING		DWG NO. 81227