


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

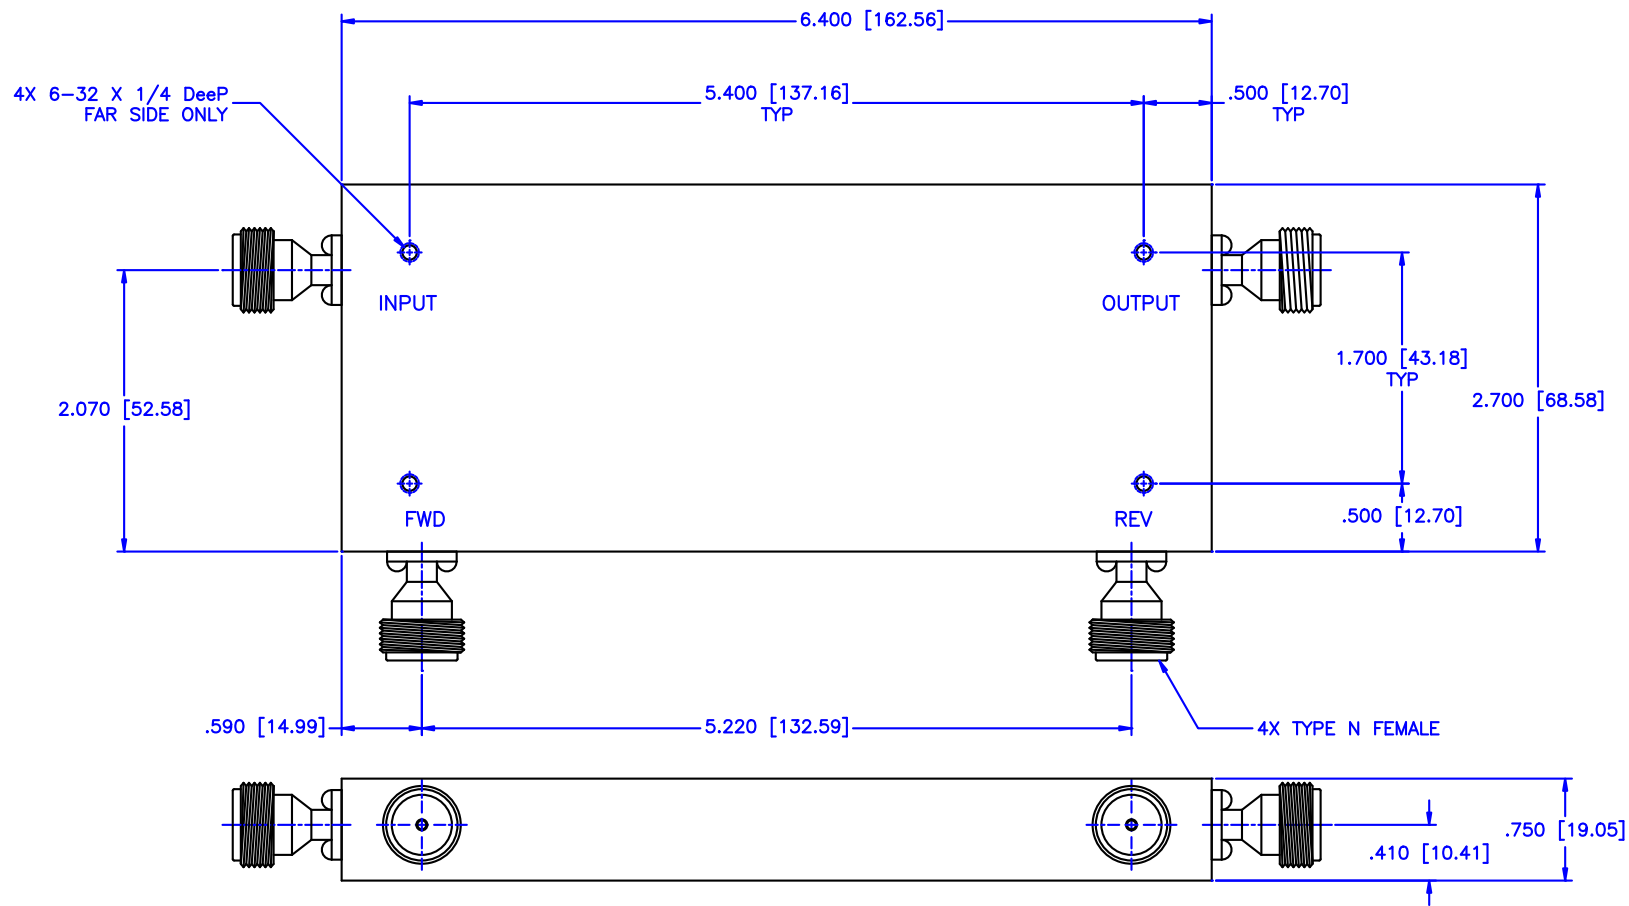

SPECIFICATIONS

- FREQUENCY RANGE: 100-1000 MHz
- POWER: 200 Watt CW
- INSERTION LOSS: 0.3dB Max.
- VSWR: 1.20:1 Max.
- FLATNESS: 1.0dB Max.
- DIRECTIVITY: 20dB Min.
- COUPLING: 10dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	HIGH POWER DIRECTIONAL COUPLER	
PART NO.		HDL-24-10		
DRAWN:	DATE:	CAGE CODE:	SIZE:	REV:
Pai boon Luekhamhan	12-20-2010	OD2L5	N/A	N/A
APPROVED:	DATE:	DO NOT SCALE THE DRAWING		DWG NO.
T. Nguyen	12-20-2010			85148