

ISOLATOR 2-4GHZ

SFI2040

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 2-4 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.35:1 TYP
LOSS 0.5DB MAX
FORWARD POWER: 10W CW
REVERSE POWER: 1W CW
ISOLATION: 18 DB TYP

MECHANICAL

HOUSING: ALUMINUM
CONNECTORS: SMA-F, STAINLESS STEEL


TYPICAL OPERATING TEMPERATURE: +25°C

ROHS COMPLIANT

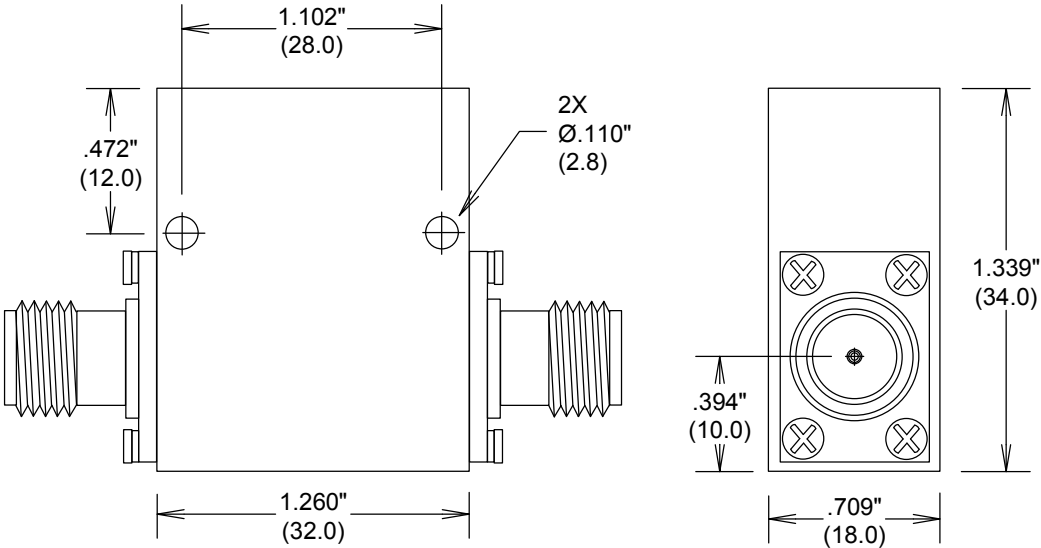

REVISION B: INCLUDES CHANGES IN BODY

MEASUREMENTS BELOW ARE TYPICAL

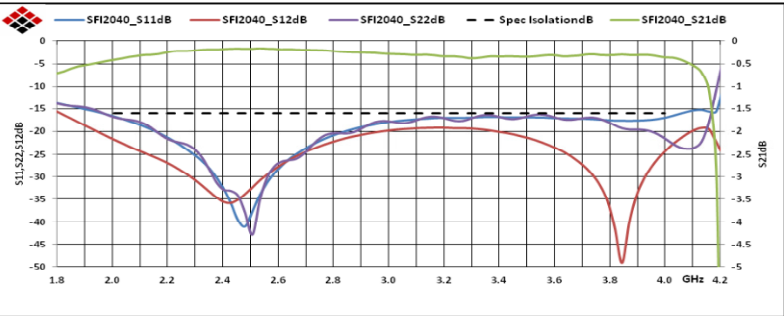

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ISOLATOR 2-4GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SFI2040

REV

C

SCALE

SHEET