

DESCRIPTION:



PMI MODEL NUMBER DTA-18G40G-30-CD-2 IS A 10 BIT PROGRAMMABLE 30 dB ATTENUATOR WITH STEP RESOLUTION AS LOW AS 0.03 dB OVER THE FREQUENCY RANGE OF 18 GHz TO 40 GHz. THIS MODEL IS OFFERED IN THE SLIM LINE HOUSING MEASURING ONLY 0.5" IN HEIGHT WITH 2.4mm FEMALE CONNECTORS.

SPECIFICATIONS:

- FREQUENCY: 18 GHz TO 40 GHz
- MEAN ATTENUATION RANGE: 30 dB
- INSERTION LOSS: 6.0 dB TYP
- VSWR: 2.5:1 MAX
- FLATNESS: ±1.5 dB TYP
- ACCURAY OF ATTENUATION: ±2.0 dB TYP
- POWER HANDLING CAPABILITY: +24 dBm CW MAX
- INPUT 1dB COMPRESSION: +10 dBm TYP
- SWITCHING TIME:
 - ON TIME 1.0 us MAX
 - OFF TIME 0.5 us MAX
- POWER SUPPLY: 15V @ 100mA MAX
- CONNECTORS: (2) 2.4mm(F) & 15 PIN Micro-D-Female
Shipped with mating Micro-D Male
- WEIGHT: 3.0 oz (85 gm) Approximate
- FINISH: PAINTED GRAY
- LOGIC INPUT:
 - LOGIC "0" (BIT OFF) -0.3 to +0.8V
 - LOGIC "1" (BIT ON) +2.0 to +5.0V

PIN NO:	J3 PIN FUNCTIONS
1	1dB
2	0.5dB
3	0.25dB
4	0.125dB
5	GND
6	0.06 dB
7	0.03 dB (LSB)
8	GND
9	Not Used
10	Not Used
11	+12VDC
12	16dB (MSB)
13	8dB
14	4dB
15	2dB

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	12/28/11	<i>PJK</i>

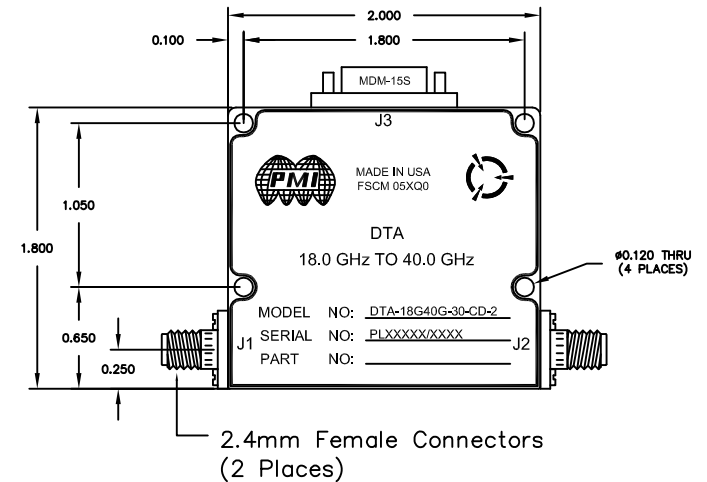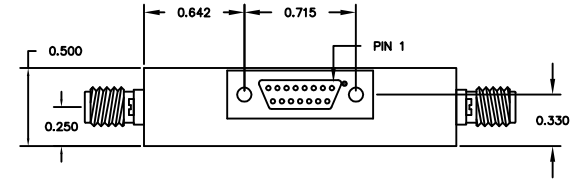

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -40°C TO +85°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2008 CERTIFIED



APPROVALS		DATE	TITLE			
<i>K.M</i>		12/28/11	PRODUCT FEATURE			
DRAWN			DTA-18G40G-30-CD-2			
CHECKED			SIZE	FSCM NO.	DWG NO.	REV.
ISSUED			A	05XQ0	27015981	A
SCALE N:S			SHEET 1 OF 1			