

OUTPUT**Frequency**

1 GHz

Level

+13 dBm ±2 dB into 50 ohms

STABILITY**Aging**

1 x 10⁻⁶ first year
 after 30 days operating, typical
 5 x 10⁻⁷ second year, typical
 3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), typical

100 Hz -109 dBc/Hz
 1 KHz -136 dBc/Hz
 10 KHz -153 dBc/Hz
 100 KHz -154 dBc/Hz
 1 MHz -160 dBc/Hz
 10 MHz -165 dBc/Hz

Temperature Stability±5 x 10⁻⁷, 0° to +50°C (Ref +25°C)**Harmonics**

≤ -25 dBc

Sub-Harmonics

≤ -60 dBc

Spurious

≤ -80 dBc, excluding power
 supply line related spurs

MECHANICAL**Dimensions**

3.21 x 4 x 1"

Connectors

SMA(f) and solder pins

Packaging

Nickel-plated machined
 aluminum housing – J2

Mounting

Threaded inserts on base,
 #2-56, 6 places, 0.190" deep

POWER REQUIREMENTS**Warm-Up Power**

≤ 13 Watts for 5 minutes

Total Power

≤ 10 Watts at +25°C

Supply Voltage

+12 VDC ±5%

ADJUSTMENT**Mechanical Tuning**±4 x 10⁻⁶**Electrical Tuning**±5 x 10⁻⁷, ±5 VDC

Negative slope

CRYSTAL**Type**

100 MHz SC-cut (x10)

OTHER**Design**

Includes a SAW filter for improving the
 phase noise beyond the ~300 kHz offset.

Label

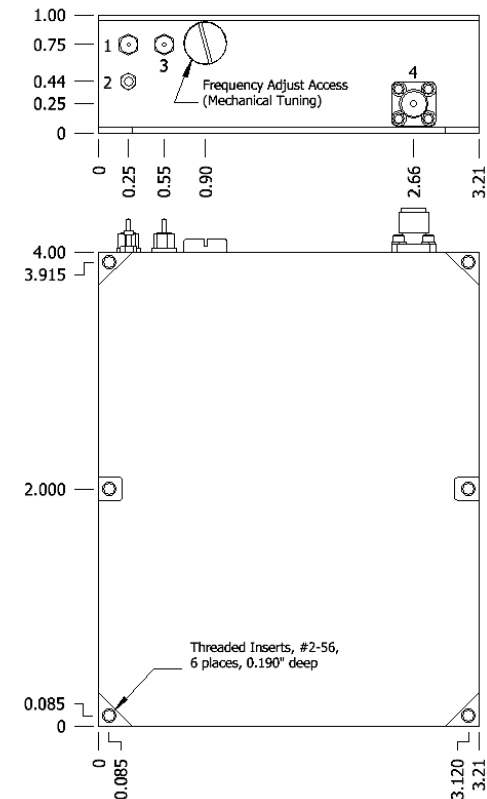
Use conventional label with the
 following information:
 501-26483 (Current Rev.)
 1 GHz MXO-FR
 +12 VDC
 Serial # - Date Code
 (Mark connectors with function)

Test Data

Output Level
 Phase Noise
 Temperature Stability
 Harmonics, Subs, Spurious
 Power – Warm-up and Total
 Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	12-11-12	Initial Release	PAC	

J2 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output

**Wenzel Associates, Inc.**

Austin, Texas

Title:

1 GHz Multiplied Crystal Oscillator (MXO-FR)

P/N:

501-26483

Rev:

-

Date:

12-11-12

Drawn:

Ref:

23202a

Tolerances:
 (except as noted)
 Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 1