



## 特点:

- ⊕ 良好的屏蔽效果 — -120dB
- ⊕ 良好的稳定特性和低损耗
- ⊕ 低无源互调

## 典型指标:

型号	141-01-01-100R
接口	SMAm-SMAm
长度	100mm
工作频率	DC-12.4GHz
插入损耗	0.3dB@DC-3GHz 0.5dB@3-6GHz 0.70dB@6-10GHz 0.80dB@10-12.4GHz
驻波比	1.10@DC-3GHz 1.15@3-6GHz 1.20@6-12.4GHz
功率容量	0.13kW @ 12.4GHz

## 订货:

141 - XX - XX - XXX X

## Basic Model Number

Conn. 1:  
01 - SMAm, 03 - Nm  
07 - DIN7/16m  
52 - Nf Bulkhead  
54 - DIN7/16 f Flg.  
58 - SMAf Bulkhead

Conn. 2:  
01 - SMAm, 03 - Nm  
07 - DIN7/16m  
52 - Nf Bulkhead  
54 - DIN7/16 f Flg.  
58 - SMAf Bulkhead

## Length in mm


## Cable Typ.

F - Semi-flex, R - Semi-rigid

## 备注:

1. 型号举例 — 141-01-01-100-12-G, 表示半刚电缆组件, SMAm-SMAm, 0.1 米长, 12.4GHz;
2. DIN7/16 的最高频率为 7.5GHz;
3. 如需其它型号的接头, 请联系销售人员。

141-01-01-100R 的典型 S21 指标:

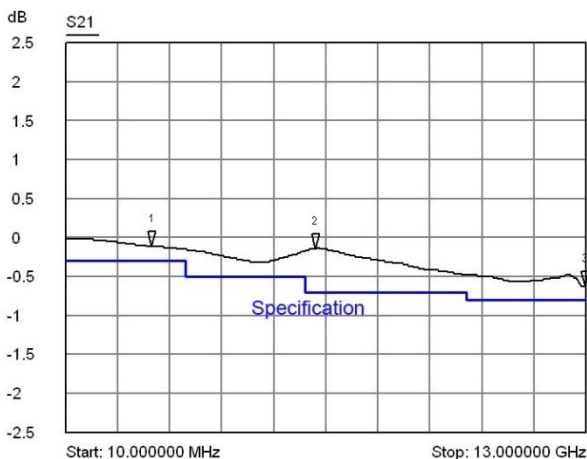

141-01-01-100R 的典型 S11 指标:

