



Uncontrolled Drawing

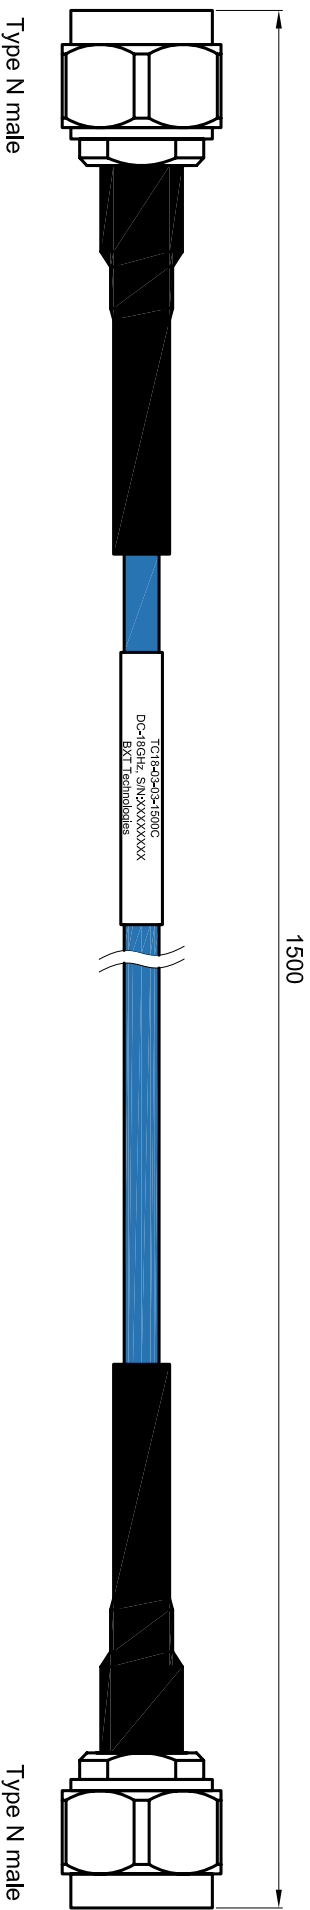

Specification:

1. Model: TC18-03-1500C
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-18GHz, Ext. to 20GHz
4. VSWR: 1.10@DC-6GHz, 1.20@6-13GHz, 1.25@13-18GHz, 1.30@18-20GHz
5. Insertion Loss: 1.25dB@DC-3GHz, 1.80dB@3-6GHz, 2.90dB@6-13GHz, 3.90dB@13-18GHz, 5.10dB@18-20GHz
6. Power Capacity(sea level 25°C ambient temperature); ≤20W@18GHz
7. Min. One Time Bend Radius: 25.4mm
8. Phase stability vs Flexure: ±2°@18GHz; 360 degree bend, 38mm radius
9. Temperature Range: -50°C~+80°C
10. Connector: Nm-Nm, Stainless Steel
11. Length: 1.5m

参量项目	数量	规格/名称、单位、材料标准等	图号	505.2209
设计	DESIGNED_ZYY	校对	CHECKED_ZH	审核 - 日期
		批准	APPROVED_	
		文件名称	FILENAME	日期
				10/9/19
		图号		505.2209
		比例		1:1



 BXT Technologies
 Tel:0591-83789500
 www.bxt-technologies.cn

Microwave Test Cable Assembly
 TC18-03-1500C

版本
 EDITION
 图号
 SHEET