


Uncontrolled Drawing

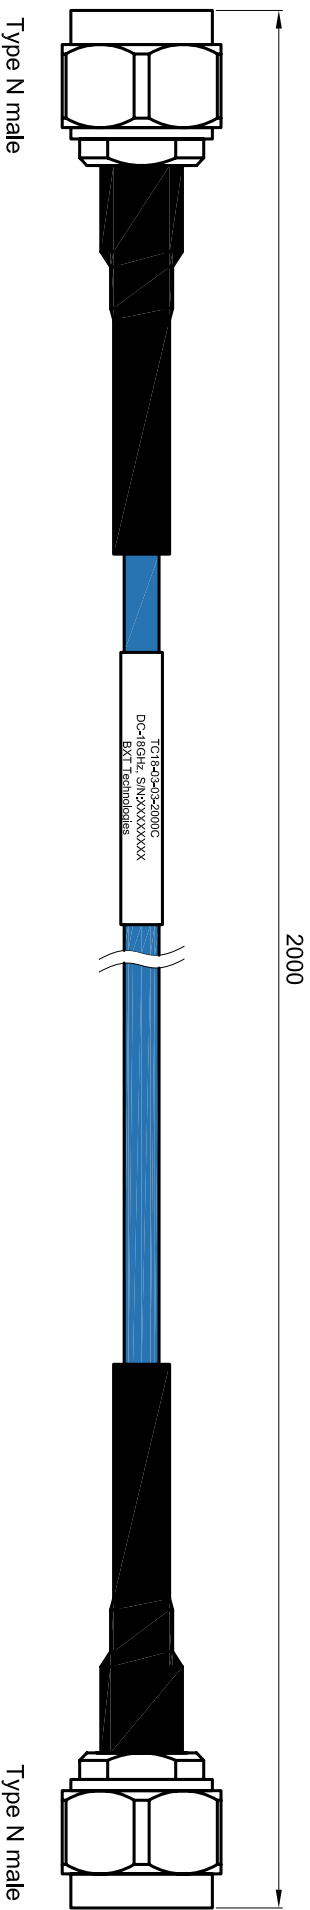

Specification:

1. Model: TC18-03-03-2000C
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-18GHz, Ext. to 20GHz
4. VSWR: 1.10@DC-6GHz, 1.20@6-13GHz, 1.25@13-18GHz, 1.30@18-20GHz
5. Insertion Loss: 1.60dB@DC-3GHz, 2.35dB@3-6GHz, 3.80dB@6-13GHz, 5.10dB@13-18GHz, 6.70dB@18-20GHz
6. Power Capacity(sea level 25°C ambient temperature); ≤20W@18GHz
7. Min. One Time Bend Radius: 25.4mm
8. Phase stability vs Flexure: ±2°@18GHz; 360 degree bend, 38mm radius
9. Temperature Range: -50°C~+80°C
10. Connector: Nm-Nm, Stainless Steel
11. Length: 2m

参量/项目	数量	规格/名称、型号、材料标准等	图号	505.2213
设计	DESIGNED_ZYY	校对	CHECKED_ZH	审核 - 日期
			APPROVED_	
			FILENAME	日期
				10/10/22
				数量
				1:1

BXT
RF Technologies

BXT Technologies
Tel:0591-83789500
www.bxt-technologies.cn

Microwave Test Cable Assembly
TC18-03-03-2000C

版本
EDITION

图框
SHEET