

# KR Electronics 2599 Bandpass Filter

## General Description


KR 2599 is a 105 MHz bandpass filters. Other passband frequencies are available. Please consult the factory.

### Features


- 105 MHz Bandpass
- 50  $\Omega$  Source and Load
- SMA Connectors

## Typical Performance

**Passband Amplitude & Return Loss**  
(1 dB/div & 5 dB/div)

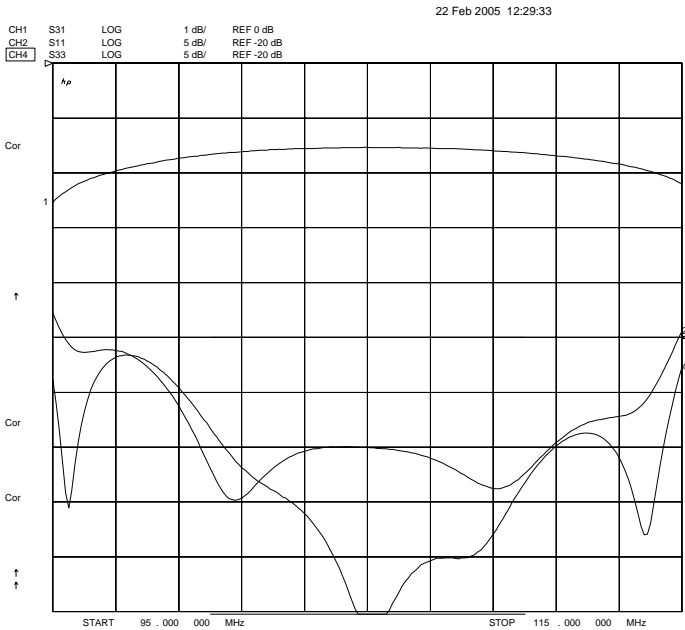

**Overall Response**  
(10 dB/div)

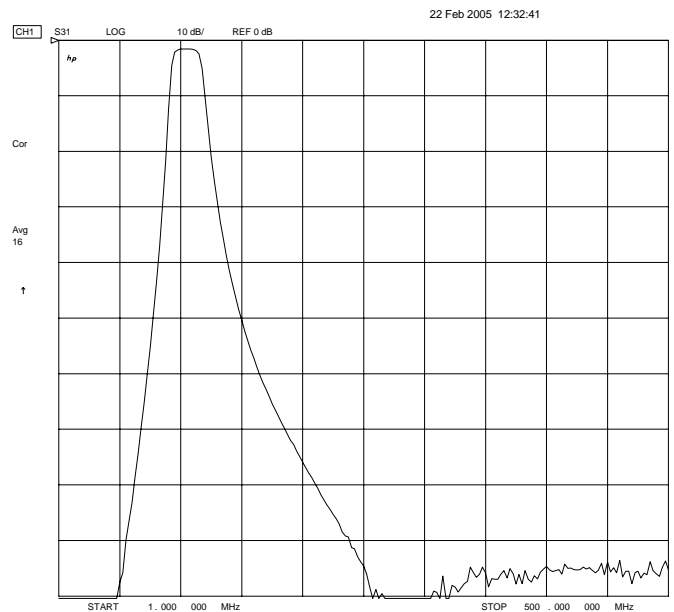

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2599 Bandpass

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	105 MHz
Insertion Loss	< 3 dB (< 2 dB Typical)
Minimum 1 dB Bandwidth	10 MHz
Source & Load	50 Ω

## Physical Dimensions

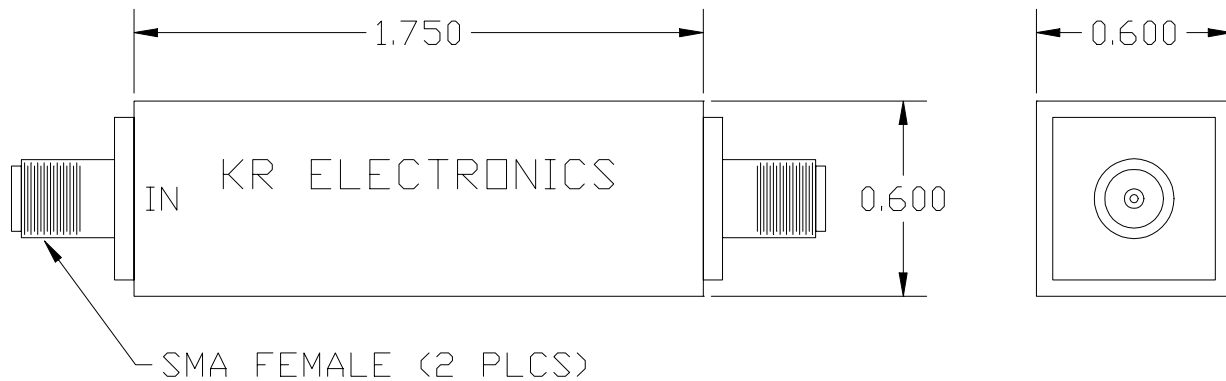

Dimensions shown in inches