



WR-42 to 2.92mm Female Waveguide to
Coax Adapter 18 GHz to 26.5 GHz

TECHNICAL DATA SHEET

PE9812

WR-42 to 2.92mm Female Waveguide to Coax Adapter 18 GHz to 26.5 GHz

Configuration

Waveguide Interface	WR-42
RF Connector	2.92mm Female
RF Connector Impedance	50 Ohms

Electrical Specifications

Frequency Range, GHz	18 to 26.5
Maximum VSWR	1.4:1

Mechanical Specifications

Size

Length, in [mm]	0.88 [22.35]
Width/Dia., in [mm]	0.88 [22.35]
Height, in [mm]	1.06 [26.92]

Waveguide Interface

Type	WR-42
Body Material and Plating	Aluminum

RF Connector

Type	2.92mm Female
Body Material and Plating	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

WR-42 to 2.92mm Female Waveguide to Coax Adapter 18 GHz to 26.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-42 to 2.92mm Female Waveguide to Coax Adapter 18 GHz to 26.5 GHz PE9812](http://www.pasternack.com/wr-42-sma-female-waveguide-coax-adapter-18-ghz-26.5-ghz-pe9812-p.aspx)

URL: <http://www.pasternack.com/wr-42-sma-female-waveguide-coax-adapter-18-ghz-26.5-ghz-pe9812-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9812 CAD Drawing

WR-42 to 2.92mm Female Waveguide to Coax Adapter 18 GHz to 26.5 GHz

WR42		
Dimension	Inches	mm
A	0.640	16.26
H	0.875	22.23
J	0.670	17.02
K (± 0.002)	0.420	10.67
L (± 0.002)	0.170	4.32

O	0.780	19.81
P	1.060	26.92

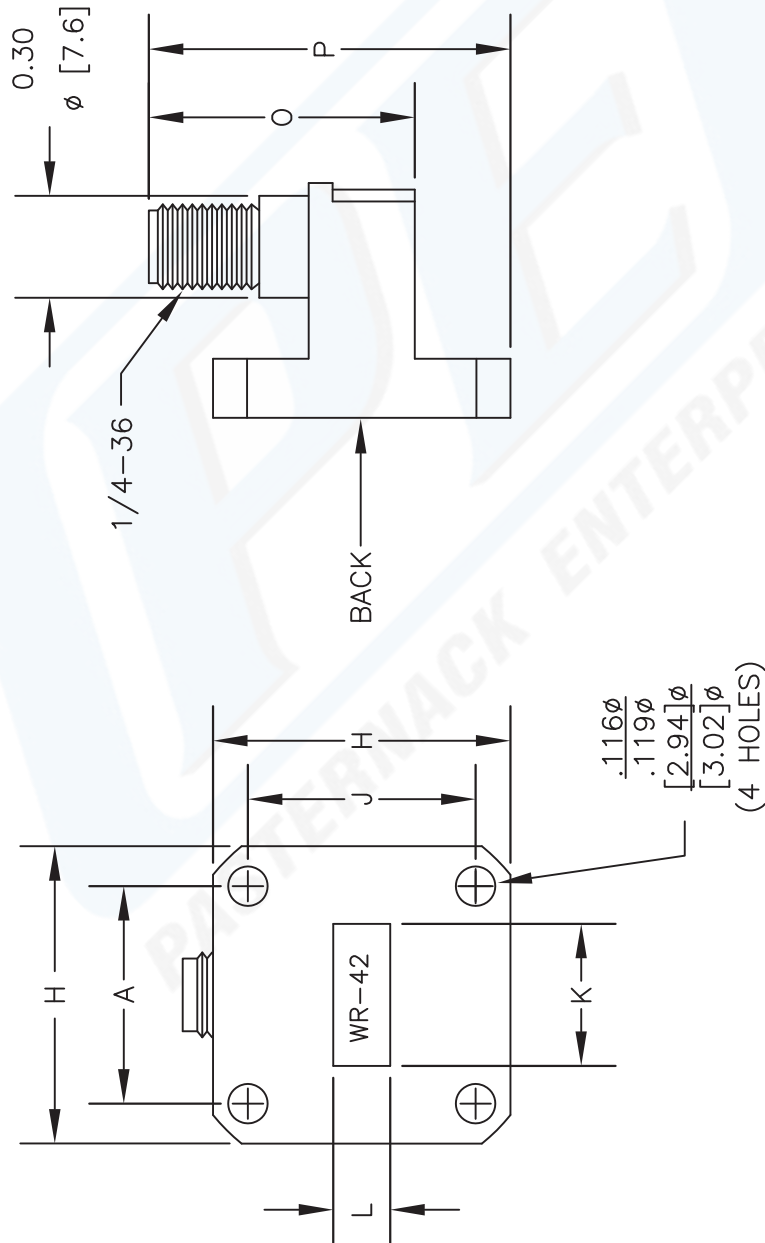

DWG TITLE

PE9812

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



ESTABLISHED 1972

FSCM NO. 53919

CAD FILE

030612

SCALE

N/A

SIZE

A

2233